

## DATASHEET

### PART NUMBER

## WES297-IN-TS

**Wescon 297 Stainless Steel Microstop - 1/4-28 -  
1/2" Cutter Capacity - Internal Nylon Foot**

CLOSE QUARTERS USE STAINLESS STEEL

### WEBSITE

<https://www.wesconusa.com/products/WES297-IN-TS>




\* The image represents the general look of the series. Actual product may vary based on options selected.

## SPECIFICATIONS

|                           |                        |
|---------------------------|------------------------|
| Measurement Type          | Imperial               |
| Bearing Rating            | 10,000 rpm             |
| Bearing Type              | Dual Ball Bearings     |
| Heavy Duty Thrust Bearing | No                     |
| Incremental Adjustment    | 0.001 in               |
| Shaft Travel              | 1/8 in                 |
| Cutter Thread             | 1/4-28                 |
| Shaft                     | Threaded               |
| Shaft Diameter            | 1/4 in                 |
| Cutter Capacity           | 1/2 in                 |
| Skirt                     | Internal Thread        |
| Skirt Description         | 1/2 in Cutter Capacity |
| Foot                      | Nylon                  |
| Solid Stop                | Yes                    |
| Material                  | Stainless Steel        |
| Country of Origin         | USA                    |



WES297-IN-TS  
July 31, 2026

## Page 2 of 3



Information in this drawing is provided for reference only

Skirt Option

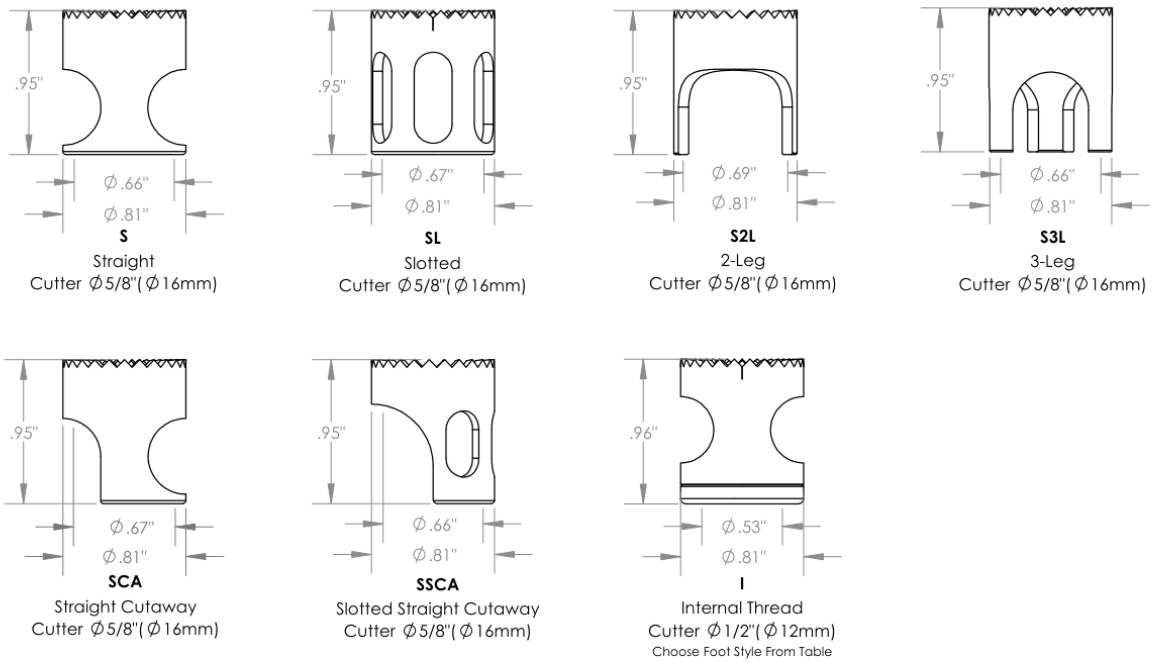

| Part Number | Material |
|-------------|----------|
| 29620-N     | Nylon    |
| 29620-S     | Steel    |
| 29620-P     | Phenolic |

Foot Style For Internal Thread



Part Number  
**WES297**

Do not modify, copy, distribute, or reproduce this drawing without prior written authorization.

© 2025 Wescon Industries Inc.  
601 Century Plaza Dr. Houston, TX 77073, US  
www.wesconusa.com

Wescon 297 Microstop

Revision 05 All dimensions are in Inches Information in this drawing is provided for reference only

Image 2