

DATASHEET

PART NUMBER

WES396-EN-TS

Wescon 396 Microstop - 1/4-28 - 1/2" Cutter Capacity - External Thread Skirt - Nylon Foot

SMALL CAPACITY / TIGHT SPACE APPLICATIONS

WEBSITE

<https://www.wesconusa.com/products/WES396-EN-TS>



* The image represents the general look of the series. Actual product may vary based on options selected.

SPECIFICATIONS

| | |
|----------------------------------|-------------------------|
| Measurement Type | Imperial |
| Bearing Rating | 10,000 rpm |
| Bearing Type | Dual Ball Bearings |
| Heavy Duty Thrust Bearing | No |
| Incremental Adjustment | 0.0005 in |
| Shaft Travel | 0.15 in |
| Cutter Thread | 1/4-28 |
| Shaft | Threaded Shank (1/4-28) |
| Shaft Diameter | 1/4 in |
| Cutter Capacity | 1/2 in |
| Skirt | External Thread |
| Skirt Description | 0.813 in OD |
| Foot | Nylon |
| Solid Stop | Yes |
| Material | Steel |
| Country of Origin | USA |

ADDITIONAL IMAGES AND DRAWINGS

WES396 SERIES MICROSTOP




Part Number
WES396-X-XX-XX

Shaft Option
Foot Style
Skirt Option*
Cutter Thread

| Code | Cutter Thread |
|---------|---------------|
| (Blank) | 1/4-28 |
| 6 | M6x1 |

| Code | Shaft Option |
|---------|-------------------------|
| (Blank) | 1/4in Standard Round |
| TF | Tri Flat |
| -QC | Quick Change |
| -TS | 1/4-28in Threaded Shank |

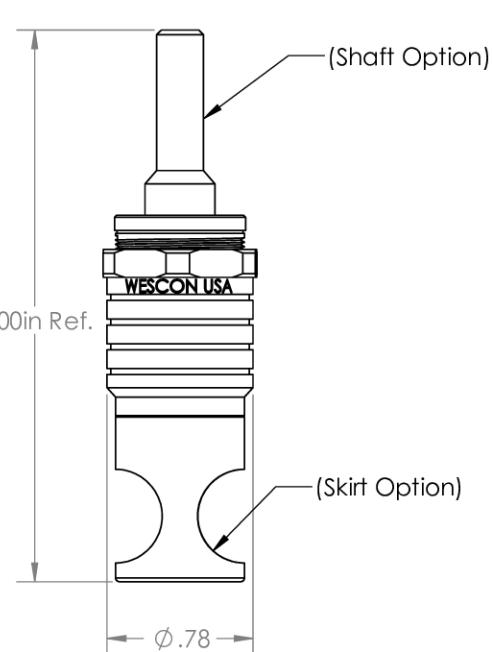

3.00in Ref.

(Shaft Option)

(Skirt Option)

$\varnothing .78$

Incremental Adjustment: 0.0005 in
Shaft Travel: 1/8 in
Material: Hardened Steel With Black Oxide Finish


Bearing Rating: 10,000 rpm
Bearing Type: Dual Ball-Bearings
Dust Seal: Integrated Dust Seal
Heavy Duty Thrust Bearing: Yes
Solid Stop: Yes

*For Skirt options see next page and website.

| | | |
|---|------------------------------|--|
|  WESCON | Part Number | WES396 |
| Wescon 396 Microstop | | |
| Revision 01 | All dimensions are in Inches | Information in this drawing is provided for reference only |


Image 1

**Foot Style
For External Thread**



| Part Number | Material |
|-------------|----------|
| 39631-N | Nylon |
| 39631-S | Steel |
| 39631-P | Phenolic |

**Foot Style
For Internal Thread**



| Part Number | Material |
|-------------|----------|
| 39620-N | Nylon |
| 39620-S | Steel |
| 39620-P | Phenolic |



Part Number

WES396

Do not modify, copy,
distribute, or reproduce
this drawing without prior
written authorization.

© 2025 Wescon Industries Inc.
601 Century Plaza Dr, Houston, TX 77073, US
www.wesconusa.com













Wescon 396 Microstop

Revision 01

All dimensions are in Inches

Information in this drawing is provided for reference only

Skirt Option

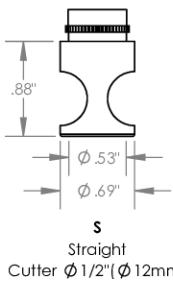

| | | |
|---|---|--|
|  | WESCON | Part Number |
| Do not modify, copy, distribute, or reproduce this drawing without prior written authorization. | © 2025 Wescon Industries Inc. 601 Century Plaza Dr, Houston, TX 77073, US www.wesconusa.com | WES396 |
| Revision 01 | All dimensions are in Inches | Information in this drawing is provided for reference only |

Wescon 396 Microstop

Image 3