

## DATASHEET

### PART NUMBER

## WES396-ES-SEP-TS

### Wescon 396 Microstop - 1/4-28 - 1/2" Cutter Capacity - Slotted Skirt External Phenolic Foot

SMALL CAPACITY / TIGHT SPACE / EXTENDED STROKE

### WEBSITE

<https://www.wesconusa.com/products/WES396-ES-SEP-TS>



\* The image represents the general look of the series. Actual product may vary based on options selected.

The Wescon 396 Series Microstop is built for tight spaces, with a smaller footprint and smaller cutters than the standard 596. With a 0.688 in (17.48 mm) skirt diameter it reaches into confined areas while keeping the dual ball bearing spindle rated to 10,000 rpm and a solid stop for repeatable depth. It takes cutters up to 1/2 in (12 mm) on a 1/4 in shaft with 0.0005 in incremental adjustment, and is offered with 0.157 in (4 mm) or 0.236 in (6 mm) shaft travel. Twelve skirt styles include straight, slotted, cutaway, 2-leg, 3-leg, internal and external thread and vacuum versions, with a nylon foot and round, threaded shank, tri-flat or quick change shafts in 1/4-28 or M6x1.


## SPECIFICATIONS

|                           |                         |
|---------------------------|-------------------------|
| Measurement Type          | Imperial                |
| Bearing Rating            | 10,000 rpm              |
| Bearing Type              | Dual Ball Bearings      |
| Heavy Duty Thrust Bearing | No                      |
| Incremental Adjustment    | 0.0005 in               |
| Shaft Travel              | 0.25 in                 |
| Cutter Thread             | 1/4-28                  |
| Shaft                     | Threaded Shank (1/4-28) |
| Shaft Diameter            | 1/4 in                  |
| Cutter Capacity           | 1/2 in                  |
| Skirt                     | Slotted External Thread |
| Skirt Description         | 0.813 in OD             |

|                          |                             |
|--------------------------|-----------------------------|
| <b>Foot</b>              | Phenolic                    |
| <b>Solid Stop</b>        | Yes                         |
| <b>Material</b>          | Steel                       |
| <b>Stroke Length</b>     | 0.236 in (6mm) Shaft Travel |
| <b>Country of Origin</b> | USA                         |

ADDITIONAL IMAGES AND DRAWINGS

WES396 Series Microstop

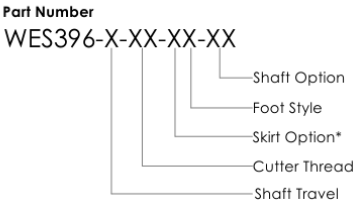

Incremental Adjustment: 0.0005 in  
Material: Carbon Steel Body With  
Hardened Tool Steel Shaft


Bearing Rating: 10,000 rpm  
Bearing Type: Dual Ball-Bearings  
Dust Seal: Integrated Dust Seal  
Heavy Duty Thrust Bearing: No  
Solid Stop: Yes

| Code    | Shaft Travel |
|---------|--------------|
| (Blank) | 0.157in      |
| ES      | 0.246in      |

| Code    | Cutter Thread |
|---------|---------------|
| (Blank) | 1/4-28        |
| 6       | M6x1          |

| Code | Foot Style |
|------|------------|
| N    | Nylon      |

| Code    | Shaft Option            |
|---------|-------------------------|
| (Blank) | 1/4in Standard Round    |
| TF      | Tri Flat                |
| QC      | Quick Change            |
| TS      | 1/4-28in Threaded Shank |

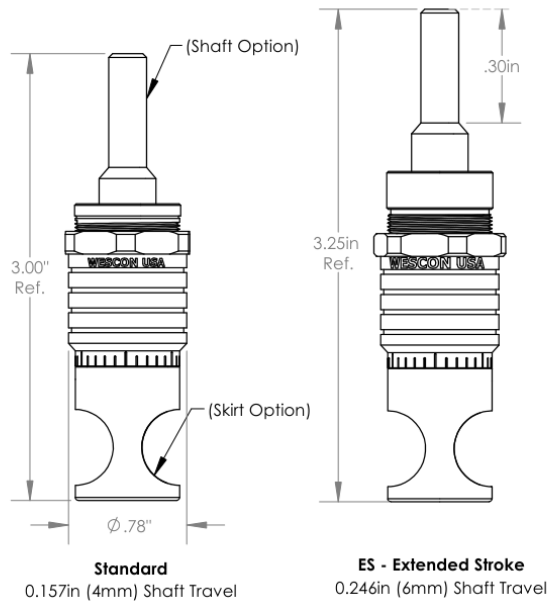

\*For Skirt options see next page and website.



Part Number  
**WES396**

Do not modify, copy, distribute, or reproduce this drawing without prior written authorization.

© 2025 Wescon Industries Inc.  
601 Century Plaza Dr. Houston, TX 77073, US  
www.wesconusa.com

Wescon 396 Microstop


Revision 10 All dimensions are in Inches Information in this drawing is provided for reference only

Image 1

## Skirt Option




**S**  
Straight  
Cutter Ø 1/2" (Ø 12mm)




**I**  
Internal Thread\*  
Cutter Ø 7/16" (Ø 11mm)




**E**  
External Thread\*  
Cutter Ø 1/2" (Ø 12mm)




**S2L**  
2-Leg  
Cutter Ø 1/2" (Ø 12mm)




**SL**  
Slotted  
Cutter Ø 1/2" (Ø 12mm)




**SI**  
Slotted Internal Thread\*  
Cutter Ø 7/16" (Ø 11mm)




**SE**  
Slotted External Thread\*  
Cutter Ø 1/2" (Ø 12mm)




**S3L**  
3-Leg  
Cutter Ø 1/2" (Ø 12mm)




**WVS**  
Vacuum Straight  
Cutter Ø 1/2" (Ø 12mm)




**WVI**  
Vacuum Internal Thread\*  
Cutter Ø 7/16" (Ø 11mm)




**WVE**  
Vacuum External Thread\*  
Cutter Ø 1/2" (Ø 12mm)




**SCA**  
Straight Cutaway  
Cutter Ø 1/2" (Ø 12mm)



**SVS**  
Slotted Vacuum Straight  
Cutter Ø 1/2" (Ø 12mm)



**SVI**  
Slotted Vacuum Internal Thread\*  
Cutter Ø 7/16" (Ø 11mm)



**SVE**  
Slotted Vacuum External Thread\*  
Cutter Ø 1/2" (Ø 12mm)

\*Select foot style from table

Revision 10

Do not modify, copy, distribute, or reproduce this drawing without prior written authorization.

All dimensions are in inches



© 2025 Wescon Industries Inc.  
601 Century Plaza Dr. Houston, TX 77073, US  
www.wesconusa.com

Information in this drawing is provided for reference only

Part Number

**WES396**

**Wescon 396 Microstop**

Image 2



| Part Number | Material |
|-------------|----------|
| 39631-N     | Nylon    |
| 39631-S     | Steel    |
| 39631-P     | Phenolic |

Foot Style For External Thread



| Part Number | Material |
|-------------|----------|
| 39620-N     | Nylon    |
| 39620-S     | Steel    |
| 39620-P     | Phenolic |

Foot Style For Internal Thread



|             |               |
|-------------|---------------|
| Part Number | <b>WES396</b> |
|-------------|---------------|

Do not modify, copy, distribute, or reproduce this drawing without prior written authorization.

© 2025 Wescon Industries Inc.  
601 Century Plaza Dr. Houston, TX 77073, US  
[www.wesconusa.com](http://www.wesconusa.com)

Wescon 396 Microstop

|             |                              |                                                            |
|-------------|------------------------------|------------------------------------------------------------|
| Revision 10 | All dimensions are in Inches | Information in this drawing is provided for reference only |
|-------------|------------------------------|------------------------------------------------------------|

Image 3