

DATASHEET

PART NUMBER

WES397-SIN

**Wescon 397 Stainless Steel Microstop - 1/4-28 -
7/16" Cutter Capacity - Slotted Skirt Internal
Nylon Foot**

SMALL CAPACITY / TIGHT SPACE APPLICATIONS
STAINLESS STEEL

WEBSITE

<https://www.wesconusa.com/products/WES397-SIN>



* The image represents the general look of the series. Actual product may vary based on options selected.

SPECIFICATIONS


Measurement Type	Imperial
Bearing Rating	10,000 rpm
Bearing Type	Dual Ball Bearings
Heavy Duty Thrust Bearing	No
Incremental Adjustment	0.0005 in
Shaft Travel	0.15 in
Cutter Thread	1/4-28
Shaft	Round
Shaft Diameter	1/4 in
Cutter Capacity	7/16 in
Skirt	Slotted Internal Thread
Skirt Description	7/16 in Cutter Capacity
Foot	Nylon
Solid Stop	Yes
Material	Stainless Steel
Stroke Length	0.157 in (4mm) Shaft Travel
Country of Origin	USA

ADDITIONAL IMAGES AND DRAWINGS

WES397 Series Microstop



Part Number
WES397-X-XX-XX-XX



Incremental Adjustment: 0.0005 in
Material: Stainless Steel


Bearing Rating: 10,000 rpm
Bearing Type: Dual Ball-Bearings
Dust Seal: Integrated Dust Seal
Heavy Duty Thrust Bearing: No
Solid Stop: Yes

Code	Shaft Travel
(Blank)	0.157in
ES	0.246in

Code	Cutter Thread
(Blank)	1/4-28
6	M6x1

Code	Foot Style
N	Nylon

Code	Shaft Option
(Blank)	1/4in Standard Round
TF	Tri Flat
QC	Quick Change
TS	1/4-28in Threaded Shank

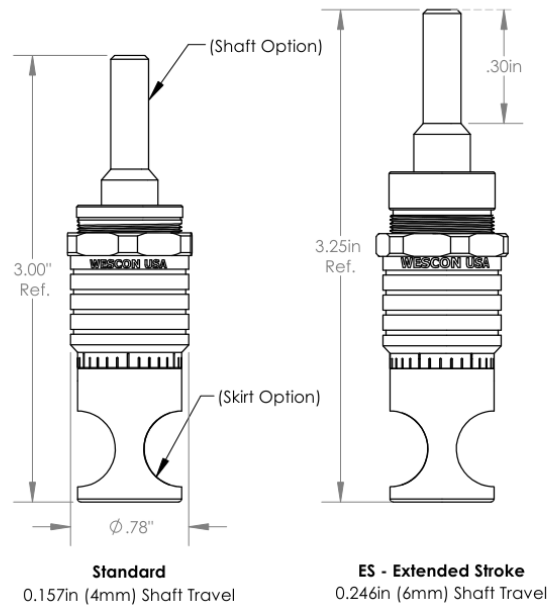

*For Skirt options see next page and website.



Part Number	
-------------	--

WES397

Do not modify, copy, distribute, or reproduce this drawing without prior written authorization.

© 2025 Wescon Industries Inc.
601 Century Plaza Dr. Houston, TX 77073, US
www.wesconusa.com

Wescon 397 Microstop


Revision 05

All dimensions are in Inches


Information in this drawing is provided for reference only

Image 1


Skirt Option




S
Straight
Cutter Ø 1/2" (Ø 12mm)




I
Internal Thread*
Cutter Ø 7/16" (Ø 11mm)




E
External Thread*
Cutter Ø 1/2" (Ø 12mm)




S2L
2-Leg
Cutter Ø 1/2" (Ø 12mm)




SL
Slotted
Cutter Ø 1/2" (Ø 12mm)




SI
Slotted Internal Thread*
Cutter Ø 7/16" (Ø 11mm)




SE
Slotted External Thread*
Cutter Ø 1/2" (Ø 12mm)




S3L
3-Leg
Cutter Ø 1/2" (Ø 12mm)




WVS
Vacuum Straight
Cutter Ø 1/2" (Ø 12mm)




WVI
Vacuum Internal Thread*
Cutter Ø 7/16" (Ø 11mm)




WVE
Vacuum External Thread*
Cutter Ø 1/2" (Ø 12mm)




SCA
Straight Cutaway
Cutter Ø 1/2" (Ø 12mm)



SVS
Slotted Vacuum Straight
Cutter Ø 1/2" (Ø 12mm)



SVI
Slotted Vacuum Internal Thread*
Cutter Ø 7/16" (Ø 11mm)



SVE
Slotted Vacuum External Thread*
Cutter Ø 1/2" (Ø 12mm)

*Select foot style from table

Revision 06

Do not modify, copy,
distribute, or reproduce
this drawing without prior
written authorization.

All dimensions are in Inches



© 2025 Wescon Industries Inc.
601 Century Plaza Dr. Houston, TX 77073, US
www.wesconusa.com


Information in this drawing is provided for reference only

Part Number

WES397


Wescon 397 Microstop

Image 2



Part Number	Material
39631-N	Nylon
39631-S	Steel
39631-P	Phenolic

Foot Style For External Thread



Part Number	Material
39620-N	Nylon
39620-S	Steel
39620-P	Phenolic

Foot Style For Internal Thread



Part Number

WES397

Do not modify, copy, distribute, or reproduce this drawing without prior written authorization.

© 2025 Wescon Industries Inc.
601 Century Plaza Dr. Houston, TX 77073, US
www.wesconusa.com

Wescon 397 Microstop

Revision 05

All dimensions are in Inches

Information in this drawing is provided for reference only

Image 3