

DATASHEET

PART NUMBER

WES5831-48

Wescon WES5831 Handle for SF Drill Bushings - 3/4"

Removable drill bushing handle for slip/fixed renewable SF drill bushings.

WEBSITE

<https://www.wesconusa.com/products/WES5831-48>



* The image represents the general look of the series. Actual product may vary based on options selected.

Quick change spoon style handle for slip/fixed renewable SF drill bushings, giving the operator a firm, comfortable grip while holding the bushing square to the work surface. The 30 degree head offset keeps your hand clear of the drill motor and improves visibility in tight airframe structures. Machined from anodized aluminum for wear resistance and light weight, with the lock screw included so bushings can be swapped without additional tooling. Made in the USA.

SPECIFICATIONS

Drill Bushing Size	3/4"
Drill Bushing Type	SF Drill Bushing
Compatible Bushing	SF-48-12 / SF-48-16
Length	5.38"
Width	0.75"
Head Offset Angle	30°
Material	Anodized Aluminum
Lock Screw	Included
Country of Origin	USA

Drill Bushing Handles

PART NUMBER
WES5831-X


– Bushing Diameter

Description: Drill Bushing Handle

Material: Anodized Aluminium

Part Number	^B (Bushing Hole Ø)	Bushing*	Bushing Diameter (I.D)	Bushing Diameter (O.D)
WES5831-20	5/16"	WESSF-20-12 / WESSF-20-16	1/16 to #10	5/16"
WES5831-32	1/2"	WESSF-32-08 / WESSF-32-12	5/32 to 11/32	1/2"
WES5831-48	3/4"	WESSF-48-12 / WESSF-48-16	5/16 to 9/16	3/4"

*see WESSF catalog for details

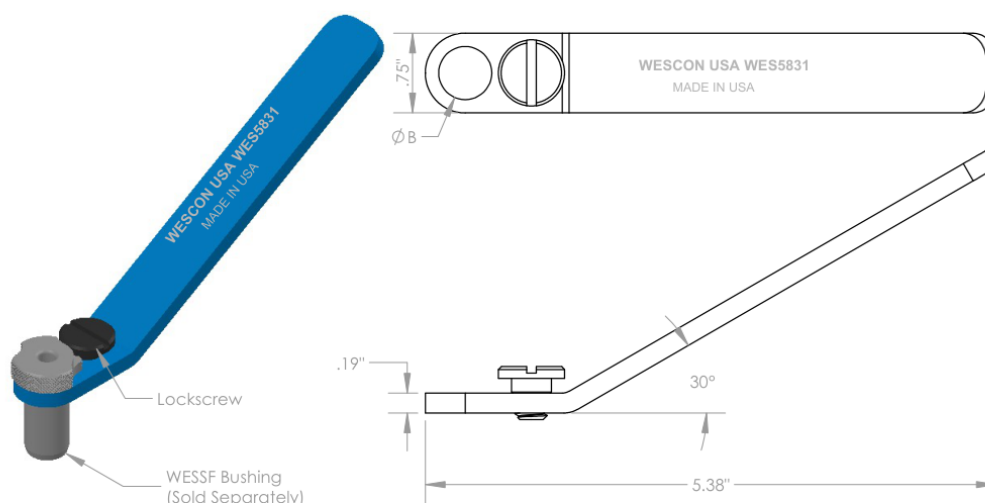

Notes from our Engineering Team

- Use WESSF bushings (sold separately); see table for dimensions.
- See wesconusa.com for browsing full list of WESSF bushing sizes. Custom size available upon request.



Part Number	
-------------	--

WES5831 Series

Do not modify, copy, distribute, or reproduce this drawing without prior written authorization.

© 2025 Wescon Industries Inc.
601 Century Plaza Dr. Houston, TX 77073, US
www.wesconusa.com

Drill Bushing Handle

Revision 00

All dimensions are in Inches

Information in this drawing is provided for reference only

Image 1