

## DATASHEET

### PART NUMBER

## WES596-6-S-875-TF

**Wescon 596 Microstop - M6x1 - 15.88 mm Cutter  
Capacity - Straight 0.875 in OD**

HIGH SPEED HEAVY DUTY

### WEBSITE

<https://www.wesconusa.com/products/WES596-6-S-875-TF>




\* The image represents the general look of the series. Actual product may vary based on options selected.

## SPECIFICATIONS


|                           |                                      |
|---------------------------|--------------------------------------|
| Measurement Type          | Metric                               |
| Bearing Rating            | 10,000 rpm                           |
| Bearing Type              | Dual Ball Bearings                   |
| Heavy Duty Thrust Bearing | Yes                                  |
| Incremental Adjustment    | 0.013 mm                             |
| Shaft Travel              | 7.60 mm                              |
| Dust Seal                 | Integrated Dust Seal                 |
| Cutter Thread             | M6x1                                 |
| Shaft                     | Tri-Flat                             |
| Shaft Diameter            | 6.35 mm                              |
| Cutter Capacity           | 15.88 mm                             |
| Skirt                     | Straight 0.875 in OD                 |
| Skirt Description         | 22.22 mm OD 15.88 mm Cutter Capacity |
| Solid Stop                | Yes                                  |
| Material                  | Steel                                |
| Country of Origin         | USA                                  |

ADDITIONAL IMAGES AND DRAWINGS

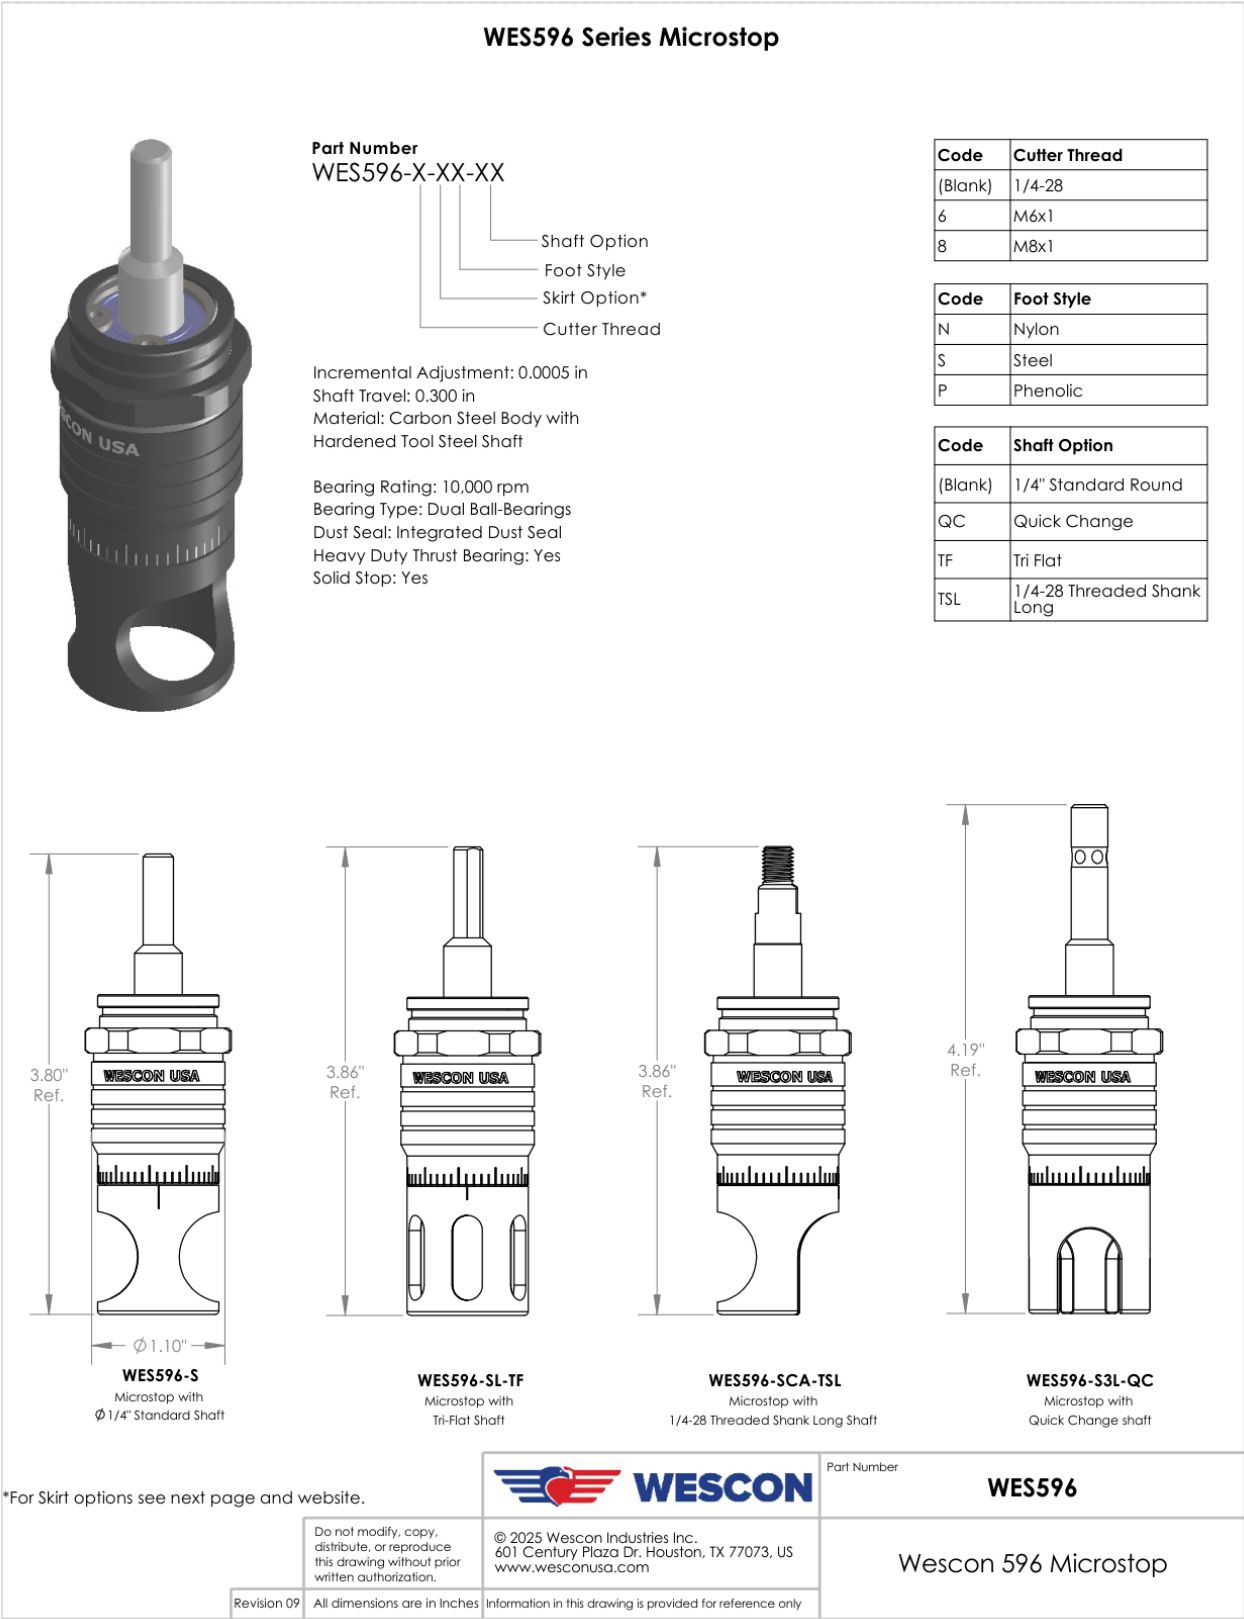





**WES596-S**  
Microstop with  
Ø 1/4" Standard Shaft

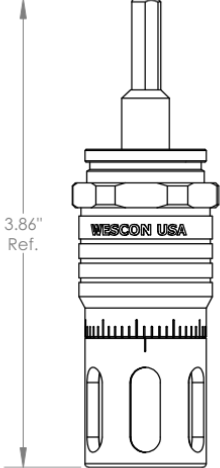

**WES596-SL-TF**  
Microstop with  
Tri-Flat Shaft

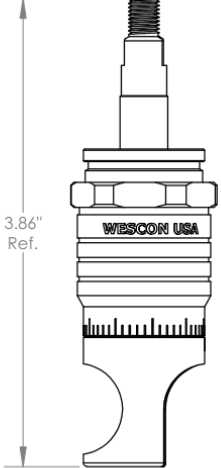

**WES596-SCA-TSL**  
Microstop with  
1/4-28 Threaded Shank Long Shaft

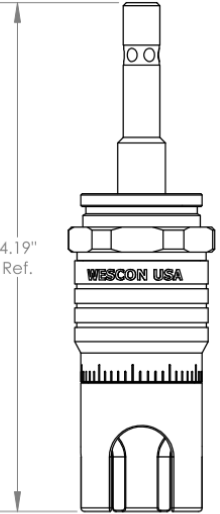

**WES596-S3L-QC**  
Microstop with  
Quick Change shaft

\*For Skirt options see next page and website.

Do not modify, copy, distribute, or reproduce this drawing without prior written authorization.

© 2025 Wescon Industries Inc.  
601 Century Plaza Dr. Houston, TX 77073, US  
www.wesconusa.com

Revision 09

All dimensions are in Inches

Information in this drawing is provided for reference only



Part Number

**WES596**

Wescon 596 Microstop

Image 1

Skirt Option


|                                                                                                                       |                                                                                                                       |                                                                                                                  |                                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| <p><b>S</b><br/>Straight<br/>Cutter <math>\phi 3/4"</math> (<math>\phi 19\text{mm}</math>)</p>                        | <p><b>I</b><br/>Internal Thread*<br/>Cutter <math>\phi 5/8"</math> (<math>\phi 15\text{mm}</math>)</p>                | <p><b>E</b><br/>External Thread*<br/>Cutter <math>\phi 3/4"</math> (<math>\phi 19\text{mm}</math>)</p>           | <p><b>SCA</b><br/>Straight Cutaway<br/>Cutter <math>\phi 3/4"</math> (<math>\phi 19\text{mm}</math>)</p>          |
| <p><b>SL</b><br/>Slotted<br/>Cutter <math>\phi 3/4"</math> (<math>\phi 19\text{mm}</math>)</p>                        | <p><b>SI</b><br/>Slotted Internal Thread*<br/>Cutter <math>\phi 5/8"</math> (<math>\phi 15\text{mm}</math>)</p>       | <p><b>SE</b><br/>Slotted External Thread*<br/>Cutter <math>\phi 3/4"</math> (<math>\phi 19\text{mm}</math>)</p>  | <p><b>SSCA</b><br/>Slotted Straight Cutaway<br/>Cutter <math>\phi 3/4"</math> (<math>\phi 19\text{mm}</math>)</p> |
| <p><b>B</b><br/>Bell<br/>Cutter <math>\phi 7/8"</math> (<math>\phi 22\text{mm}</math>)</p>                            | <p><b>BI</b><br/>Bell Internal Thread*<br/>Cutter <math>\phi 3/4"</math> (<math>\phi 19\text{mm}</math>)</p>          | <p><b>BE</b><br/>Bell External Thread*<br/>Cutter <math>\phi 7/8"</math> (<math>\phi 22\text{mm}</math>)</p>     | <p><b>FCA</b><br/>Flanged Cutaway<br/>Cutter <math>\phi 3/4"</math> (<math>\phi 19\text{mm}</math>)</p>           |
| <p><b>SBI</b><br/>Slotted Bell Internal Thread*<br/>Cutter <math>\phi 3/4"</math> (<math>\phi 19\text{mm}</math>)</p> | <p><b>SBE</b><br/>Slotted Bell External Thread*<br/>Cutter <math>\phi 7/8"</math> (<math>\phi 22\text{mm}</math>)</p> | <p><b>BWE</b><br/>Bell Wide External Thread*<br/>Cutter <math>\phi 1"</math> (<math>\phi 25\text{mm}</math>)</p> | <p><b>S-875</b><br/>Straight 0.875 in OD<br/>Cutter <math>\phi 5/8"</math> (<math>\phi 15\text{mm}</math>)</p>    |

\*Select foot style from table  
Continued In Next Page.


|                                                                                                 |                              |                                                                                                   |                      |               |
|-------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------------------|----------------------|---------------|
|                                                                                                 |                              |  <b>WESCON</b> | Part Number          | <b>WES596</b> |
| Do not modify, copy, distribute, or reproduce this drawing without prior written authorization. |                              | © 2025 Wescon Industries Inc.<br>601 Century Plaza Dr. Houston, TX 77073, US<br>www.wesconusa.com | Wescon 596 Microstop |               |
| Revision 09                                                                                     | All dimensions are in Inches | Information in this drawing is provided for reference only                                        |                      |               |

Image 2


## Skirt Option (Continuation)




**F**  
Flanged  
Cutter  $\Phi 3/4"$  ( $\Phi 19\text{mm}$ )




**FH**  
Flanged High  
Cutter  $\Phi 3/4"$  ( $\Phi 19\text{mm}$ )




**SF**  
Spherical Flanged  
Cutter  $\Phi 3/4"$  ( $\Phi 19\text{mm}$ )




**F-1125**  
Flanged 1.125 in OD  
Cutter  $\Phi 3/4"$  ( $\Phi 19\text{mm}$ )




**C**  
Close Quarters  
Cutter  $\Phi 3/8"$  ( $\Phi 10\text{mm}$ )




**F2L**  
Flanged 2-Leg  
Cutter  $\Phi 3/4"$  ( $\Phi 19\text{mm}$ )




**S2L**  
2-Leg  
Cutter  $\Phi 3/4"$  ( $\Phi 19\text{mm}$ )




**S3L**  
3-Leg  
Cutter  $\Phi 3/4"$  ( $\Phi 19\text{mm}$ )




**WVI**  
Vacuum Internal Thread\*  
Cutter  $\Phi 5/8"$  ( $\Phi 15\text{mm}$ )




**WVE**  
Vacuum External Thread\*  
Cutter  $\Phi 3/4"$  ( $\Phi 19\text{mm}$ )




**SVI**  
Slotted Vacuum Internal Thread\*  
Cutter  $\Phi 5/8"$  ( $\Phi 15\text{mm}$ )



**SVE**  
Slotted Vacuum External Thread\*  
Cutter  $\Phi 3/4"$  ( $\Phi 19\text{mm}$ )



**WVS**  
Vacuum Straight  
Cutter  $\Phi 3/4"$  ( $\Phi 19\text{mm}$ )



**SVS**  
Slotted Vacuum Straight  
Cutter  $\Phi 3/4"$  ( $\Phi 19\text{mm}$ )

\*Select foot style from table

Revision 09

Do not modify, copy, distribute, or reproduce this drawing without prior written authorization.

All dimensions are in inches



© 2025 Wescon Industries Inc.  
601 Century Plaza Dr. Houston, TX 77073, US  
www.wesconusa.com

Information in this drawing is provided for reference only


Part Number

**WES596**


Wescon 596 Microstop

Image 3


## Skirt Option




**VS**  
Vacuum Straight  
Cutter  $\frac{3}{4}$ " ( $\phi$  19mm)



**VE**  
Vacuum External Thread\*  
Cutter  $\frac{3}{4}$ " ( $\phi$  19mm)




**VI**  
Vacuum Internal Thread\*  
Cutter  $\frac{5}{8}$ " ( $\phi$  15mm)




| Part Number | Material |
|-------------|----------|
| 59631-N     | Nylon    |
| 59631-S     | Steel    |
| 59631-P     | Phenolic |

**Foot Style For External Thread**




| Part Number | Material |
|-------------|----------|
| 59620-N     | Nylon    |
| 59620-S     | Steel    |
| 59620-P     | Phenolic |

**Foot Style For Internal Thread**




| Part Number | Material |
|-------------|----------|
| 59641-N     | Nylon    |
| 59641-S     | Steel    |
| 59641-P     | Phenolic |

**Foot Style For Bell External Thread**



| Part Number | Material |
|-------------|----------|
| 59640-N     | Nylon    |
| 59640-S     | Steel    |
| 59640-P     | Phenolic |

**Foot Style For Bell Internal Thread**



| Part Number | Material |
|-------------|----------|
| 59651-N     | Nylon    |
| 59651-S     | Steel    |
| 59651-P     | Phenolic |

**Foot Style For Bell Wide External Thread**

\*Select foot style from table

Revision 09

Do not modify, copy, distribute, or reproduce this drawing without prior written authorization.

All dimensions are in Inches



© 2025 Wescon Industries Inc.  
601 Century Plaza Dr. Houston, TX 77073, US  
www.wesconusa.com

Information in this drawing is provided for reference only

Part Number

**WES596**

**Wescon 596 Microstop**

Image 4