

## DATASHEET

### PART NUMBER

### **WES596-6-S2L**

**Wescon 596 Microstop - M6x1 - 19 mm Cutter  
Capacity - 2-Leg Skirt**

HIGH SPEED HEAVY DUTY

### WEBSITE

<https://www.wesconusa.com/products/WES596-6-S2L>



\* The image represents the general look of the series. Actual product may vary based on options selected.

### SPECIFICATIONS


<b>Measurement Type</b>	Metric
<b>Bearing Rating</b>	10,000 rpm
<b>Bearing Type</b>	Dual Ball Bearings
<b>Heavy Duty Thrust Bearing</b>	Yes
<b>Incremental Adjustment</b>	0.013 mm
<b>Shaft Travel</b>	7.60 mm
<b>Dust Seal</b>	Integrated Dust Seal
<b>Cutter Thread</b>	M6x1
<b>Shaft</b>	Round
<b>Shaft Diameter</b>	6.35 mm
<b>Cutter Capacity</b>	19 mm
<b>Skirt</b>	2-Leg
<b>Skirt Description</b>	25.4 mm OD 19 mm Cutter Capacity
<b>Solid Stop</b>	Yes
<b>Material</b>	Steel
<b>Country of Origin</b>	USA

## ADDITIONAL IMAGES AND DRAWINGS



Image 1

## WES596 SERIES MICROSTOP

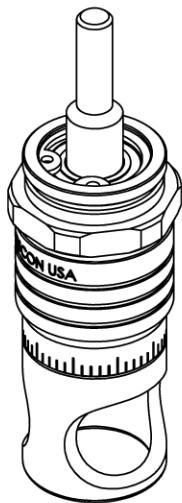

**Part Number**  
WES596-X-XX-XX

WES596-X-XX-XX  
 ———|  
 Shaft Option  
 Foot Style  
 ———|  
 Skirt Option\*  
 ———|  
 Cutter Thread


Code	Cutter Thread
(Blank)	1/4-28
6	M6x1
8	M8x1

Code	Shaft Option
(Blank)	1/4in Standard Round
-QC	Quick Change
-TF	Tri Flat
-TSL	1/4-28in Threaded Shank Long

Code	Foot Style
N	Nylon
S	Steel
P	Phenolic

Incremental Adjustment: 0.0005 in  
 Shaft Travel: 0.300 in  
 Material: Hardened Steel With Black Oxide Finish

Bearing Rating: 10,000 rpm  
 Bearing Type: Dual Ball-Bearings  
 Dust Seal: Integrated Dust Seal  
 Heavy Duty Thrust Bearing: Yes  
 Solid Stop: Yes

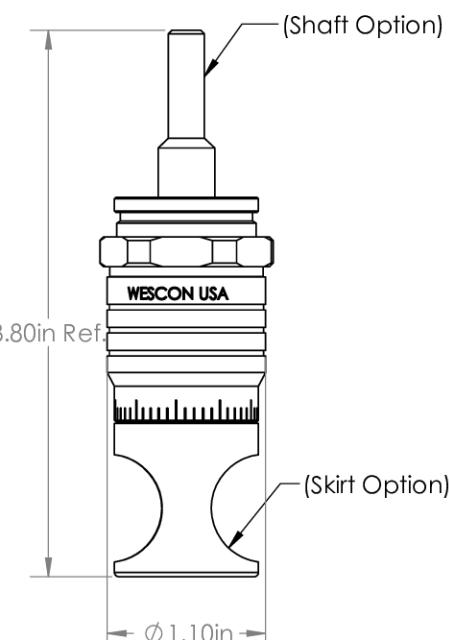

\*For Skirt options see next page and website.



Part Number

**WES596**

Wescon 596 Microstop

Do not modify, copy,  
 distribute, or reproduce  
 this drawing without prior  
 written authorization.


© 2025 Wescon Industries Inc.  
 601 Century Plaza Dr, Houston, TX 77073, US  
[www.wesconusa.com](http://www.wesconusa.com)

All dimensions are in Inches


Information in this drawing is provided for reference only

Image 2


### Skirt Option (Continuation)

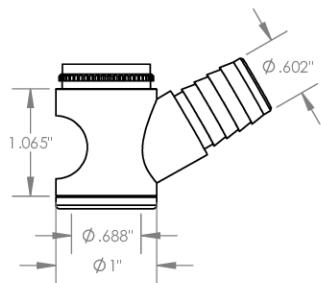


**VI**  
Vacuum Internal  
Thread  
Cutter  $\phi 5/8"$  ( $\phi 15mm$ )

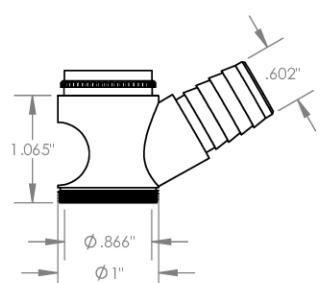

**VE**  
Vacuum External  
Thread  
Cutter  $\phi 3/4"$  ( $\phi 19mm$ )

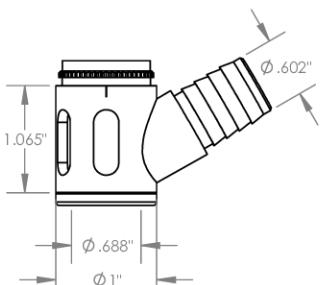

**SVI**  
Slotted Vacuum External  
Thread  
Cutter  $\phi 5/8"$  ( $\phi 15mm$ )

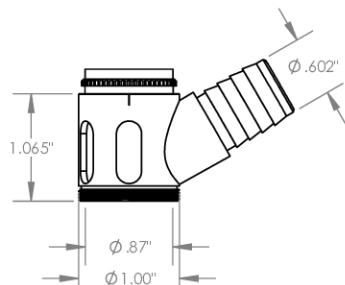

**SVE**  
Slotted Vacuum External  
Thread  
Cutter  $\phi 3/4"$  ( $\phi 19mm$ )

 <b>WESCON</b>	Part Number <b>WES596</b>
Do not modify, copy, distribute, or reproduce this drawing without prior written authorization.  All dimensions are in Inches	© 2025 Wescon Industries Inc. 601 Century Plaza Dr, Houston, TX 77073, US <a href="http://www.wesconusa.com">www.wesconusa.com</a>  Information in this drawing is provided for reference only
	Wescon 596 Microstop

Image 3


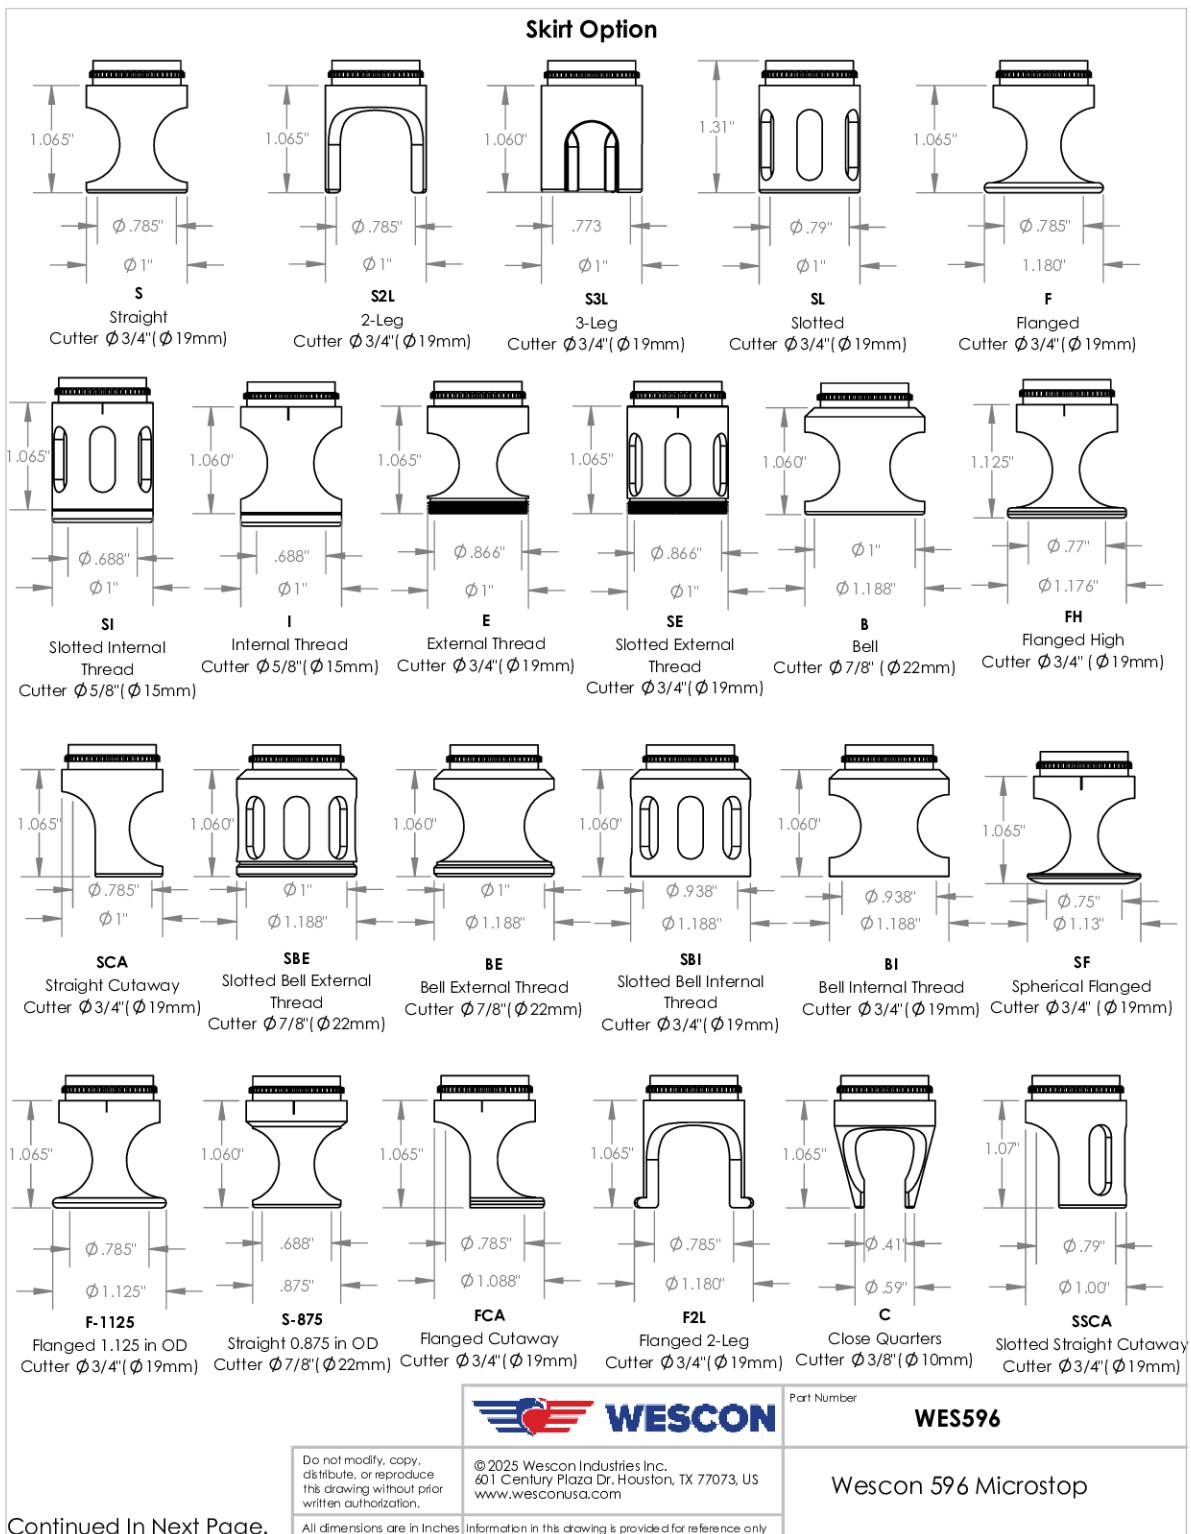



Image 4

**Foot Style  
For External Thread**

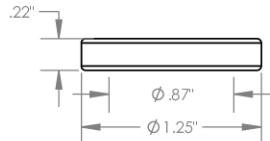


Part Number	Material
59631-N	Nylon
59631-S	Steel
59361-P	Phenolic

**Foot Style  
For Internal Thread**




Part Number	Material
59620-N	Nylon
59620-S	Steel
59620-P	Phenolic

**Foot Style  
For Bell External Thread**

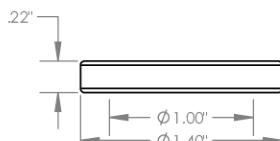

Part Number	Material
59641-N	Nylon
59641-S	Steel
59641-P	Phenolic

**Foot Style  
For Bell Internal Thread**

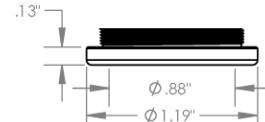

Part Number	Material
59640-N	Nylon
59640-S	Steel
59640-P	Phenolic



Part Number

**WES596**

Do not modify, copy,  
distribute, or reproduce  
this drawing without prior  
written authorization.

© 2025 Wescon Industries Inc.  
601 Century Plaza Dr, Houston, TX 77073, US  
www.wesconusa.com

All dimensions are in Inches

Information in this drawing is provided for reference only

Wescon 596 Microstop

Image 5