

DATASHEET

PART NUMBER

WES596-ER14-QC

Wescon 596-ER Extended Reach - 1/4-28 - 1/2"
Cutter Capacity - 5.00 in Length 1/2 in Cutter
Capacity Nylon Foot

EXTENDED REACH UNITS

WEBSITE

<https://www.wesconusa.com/products/WES596-ER14-QC>



* The image represents the general look of the series. Actual product may vary based on options selected.

SPECIFICATIONS


Measurement Type	Imperial
Bearing Rating	10,000 rpm
Bearing Type	Dual Ball Bearings
Heavy Duty Thrust Bearing	Yes
Incremental Adjustment	0.0005 in
Shaft Travel	0.300 in
Dust Seal	Integrated Dust Seal
Cutter Thread	1/4-28
Shaft	Quick Change
Shaft Diameter	1/4 in
Cutter Capacity	1/2 in
Skirt	5.00 in Length 1/2 in Cutter Capacity
Skirt Length	5.00 in
Skirt Description	0.688 in OD 1/2 in Cutter Capacity
Foot	Nylon
Solid Stop	Yes
Material	Steel

ADDITIONAL IMAGES AND DRAWINGS

WES596 Extended Reach Series Microstop



Part Number
WES596-X-XX-XX




Code	Shaft Option
(Blank)	1/4in standard Round
QC	Quick Change
TF	Tri Flat

Skirt Option	A (Skirt Length)	Ø B (O.D)	Ø C (I.D)	Cutter Capacity	Cutter Thread
ER1	6.00"(152.4mm)	0.68"(17.4mm)	0.55"(13.9mm)	Ø 1/2"(Ø 12.7mm)	1/4-28
ER3	4.50"(114.3mm)	0.50"(12.7mm)	0.40"(10.1mm)	Ø 3/8"(Ø 9.52mm)	1/4-28
ER5	6.00"(152.4mm)	0.50"(12.7mm)	0.40"(10.1mm)	Ø 3/8"(Ø 9.52mm)	1/4-28
ER8	6.00"(152.4mm)	0.37"(9.52mm)	0.27"(6.98mm)	Ø 1/4"(Ø 6.35mm)	10-32
ER9	6.00"(152.4mm)	0.42"(10.7mm)	0.32"(8.25mm)	Ø 5/16"(Ø 7.94mm)	1/4-28
ER14	8.00"(203.2mm)	0.68"(17.4mm)	0.53"(13.4mm)	Ø 1/2"(Ø 12.7mm)	1/4-28

*Metric M6x1 thread also available

Incremental Adjustment: 0.0005 in
 Shaft Travel: 0.300 in
 Material: Carbon Steel Body with
 Hardened Tool Steel Shaft

Bearing Rating: 10,000 rpm
 Bearing Type: Dual Ball-Bearings
 Dust Seal: Integrated Dust Seal
 Heavy Duty Thrust Bearing: Yes
 Solid Stop: Yes

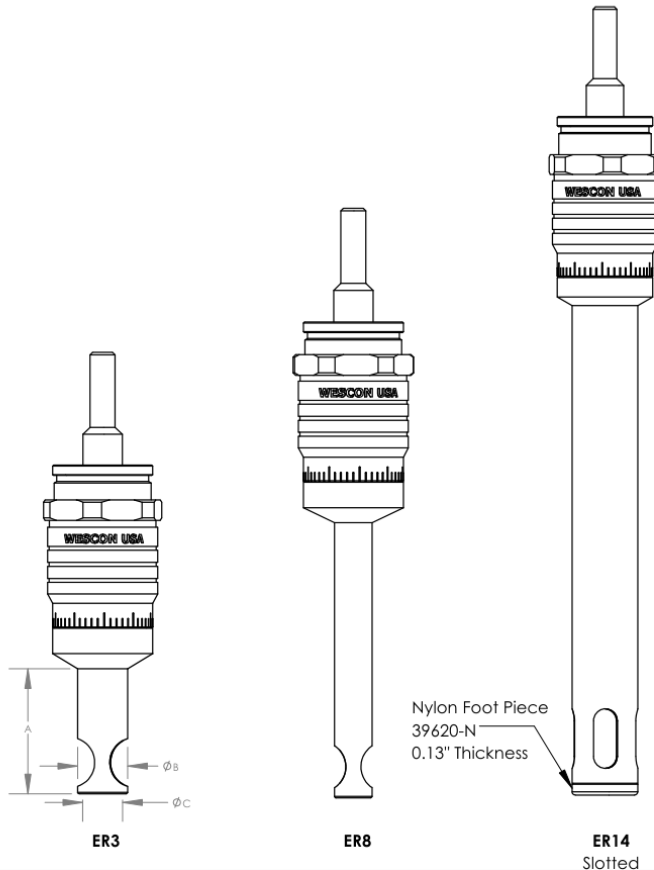

Part Number
WES596-ER

Do not modify, copy, distribute, or reproduce this drawing without prior written authorization.
 © 2025 Wescon Industries Inc. 601 Century Plaza Dr. Houston, TX 77073, US www.wesconusa.com
 Information in this drawing is provided for reference only

Wescon 596 Extended Reach Microstop

Revision 04

Image 1