Wescon Industries Inc.
601 Century Plaza Dr, Houston, TX 77073
www.wesconusa.com

DATASHEET

PART NUMBER

WES596-ES-750-EN

Wescon 596-ES Extended Stroke Microstop - 1/4-28 - 5/8" Cutter Capacity - External Nylon Foot

EXTENDED STROKE UNITS FOR DRILL / COUNTERSINK AND SPECIAL LENGTH CUTTERS

WEBSITE

https://www.wesconusa.com/products/WES596-ES-750-EN



* The image represents the general look of the series. Actual product may vary based on options selected.

The Wescon 596-ES Extended Stroke Microstop is a longer-stroke unit for special, customer-specific operations that need a longer cutter, with 0.500 in, 0.750 in or 1.000 in of shaft travel for drill-countersink combinations and special length cutters. It keeps the dual ball bearings rated to 10,000 rpm, heavy duty thrust bearing, integrated dust seal and solid stop of the standard 596, with 0.0005 in incremental adjustment, a 1/4 in shaft and 1/4-28 cutter thread for cutters up to 5/8 in. Straight or external thread skirts are offered with nylon, steel or phenolic feet.

SPECIFICATIONS

Measurement Type	Imperial
Bearing Rating	10,000 rpm
Bearing Type	Dual Ball-Bearings
Heavy Duty Thrust Bearing	Yes
Incremental Adjustment	0.0005 in
Shaft Travel	.750 in
Dust Seal	Integrated Dust Seal
Cutter Thread	1/4-28
Shaft	Round
Shaft Diameter	1/4 in
Cutter Capacity	5/8 in
Skirt	External Thread
Foot	Nylon

Subject to change without notice
© Copyright Wescon Industries Inc

Solid Stop	Yes
Material	Steel
Country of Origin	USA

Subject to change without notice
© Copyright Wescon Industries Inc

ADDITIONAL IMAGES AND DRAWINGS

WES596 Extended Stroke Series Microstop



Part Number
WES596-ES-XX-XX-XX
- Shaft Option
- Foot Style
- Skirt Option*
- Stroke Length


Code	Stroke Length
500	.500in Shaft Travel
750	.750in Shaft Travel
1000	1.000in Shaft Travel

Code	Foot Style
N	Nylon
S	Steel
P	Phenolic


Code	Shaft Option
(Blank)	Round
TF	Tri Flat

Incremental Adjustment: 0.0005 in
Cutter Thread: 1/4-28
Material: Carbon Steel Body with Hardened Tool Steel Shaft


Bearing Rating: 10,000 rpm
Bearing Type: Dual Ball-Bearings
Dust Seal: Integrated Dust Seal
Heavy Duty Thrust Bearing: Yes
Solid Stop: Yes

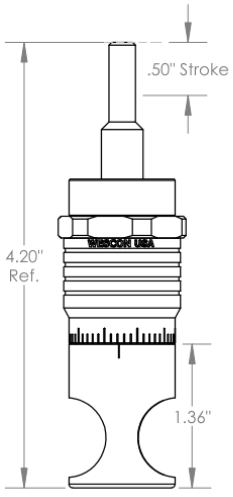

ES-500
.500in Shaft Travel

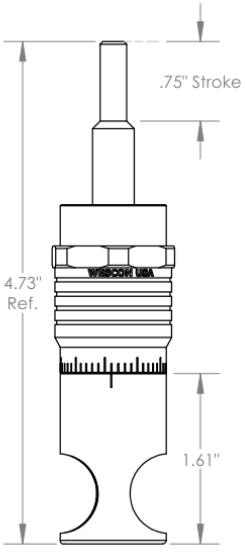

ES-750
.750in Shaft Travel

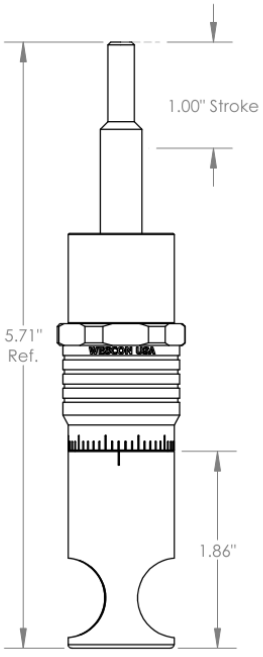

ES-1000
1.000in Shaft Travel

*For Skirt options see next page and website

WESCON

Part Number **WES596-ES**

Do not modify, copy, distribute, or reproduce this drawing without prior written authorization.

© 2025 Wescon Industries Inc.
601 Century Plaza Dr. Houston, TX 77073, US
www.wesconusa.com


Wescon 596 Extended Stroke Microstop

Revision 04 | All dimensions are in Inches | Information in this drawing is provided for reference only


Image 1

Subject to change without notice
© Copyright Wescon Industries Inc


Skirt Option



S
Straight
Cutter Ø3/4"(Ø19mm)



E
External Thread*
Cutter Ø3/4"(Ø19mm)



Part Number	Material
59631-N	Nylon
59631-S	Steel
59631-P	Phenolic

Foot Style For External Thread

*Select foot style from table

WESCON

Part Number **WES596-ES**

Do not modify, copy, distribute, or reproduce this drawing without prior written authorization.

© 2025 Wescon Industries Inc.
601 Century Plaza Dr. Houston, TX 77073, US
www.wesconusa.com

Wescon 596 Extended Stroke Microstop

Revision 04 | All dimensions are in Inches | Information in this drawing is provided for reference only

Image 2

Subject to change without notice
© Copyright Wescon Industries Inc