

## DATASHEET

### PART NUMBER

**WES596-F-1125**

**Wescon 596 Microstop - 1/4-28 - 3/4" Cutter Capacity - Flanged 1.125 in OD Skirt**

HIGH SPEED HEAVY DUTY

### WEBSITE

<https://www.wesconusa.com/products/WES596-F-1125>



### SPECIFICATIONS

<b>Measurement Type</b>	Imperial
<b>Bearing Rating</b>	10,000 rpm
<b>Bearing Type</b>	Dual Ball Bearings
<b>Heavy Duty Thrust Bearing</b>	Yes
<b>Incremental Adjustment</b>	0.0005 in
<b>Shaft Travel</b>	0.300 in
<b>Dust Seal</b>	Integrated Dust Seal
<b>Cutter Thread</b>	1/4-28
<b>Shaft</b>	Round
<b>Shaft Diameter</b>	1/4 in
<b>Cutter Capacity</b>	3/4 in
<b>Skirt</b>	Flanged 1.125 in OD
<b>Skirt Description</b>	1.125 in OD 3/4 in Cutter Capacity
<b>Solid Stop</b>	Yes
<b>Material</b>	Steel
<b>Country of Origin</b>	USA

## ADDITIONAL IMAGES AND DRAWINGS

**WES596 SERIES MICROSTOP**

**Part Number**  
WES596-X-XX-XX

Shaft Option  
Foot Style  
Skirt Option\*  
Cutter Thread

Code	Cutter Thread
(Blank)	1/4-28
6	M6x1
8	M8x1

Code	Shaft Option
(Blank)	1/4in Standard Round
-QC	Quick Change
-TF	Tri Flat
-TSL	1/4-28in Threaded Shank Long

Code	Foot Style
N	Nylon
S	Steel
P	Phenolic

Incremental Adjustment: 0.0005 in  
Shaft Travel: 0.300 in  
Material: Hardened Steel With Black Oxide Finish

Bearing Rating: 10,000 rpm  
Bearing Type: Dual Ball-Bearings  
Dust Seal: Integrated Dust Seal  
Heavy Duty Thrust Bearing: Yes  
Solid Stop: Yes

3.80in Ref.

(Shaft Option)

(Skirt Option)


$\varnothing 1.10\text{in}$

\*For Skirt options see next page and website.


<p>Do not modify, copy, distribute, or reproduce this drawing without prior written authorization.</p> <p>All dimensions are in Inches</p>	 <b>WESCON</b> <small>© 2025 Wescon Industries Inc. 601 Century Plaza Dr, Houston, TX 77073, US www.wesconusa.com</small>	Part Number <b>WES596</b>  Wescon 596 Microstop <small>Information in this drawing is provided for reference only</small>
--	---	---

Image 1


### Skirt Option (Continuation)

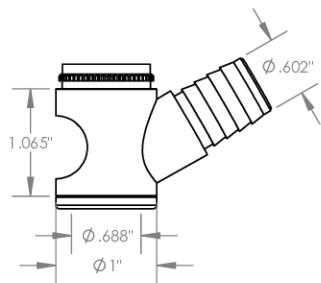


**VI**  
Vacuum Internal  
Thread  
Cutter  $\phi 5/8"$  ( $\phi 15mm$ )

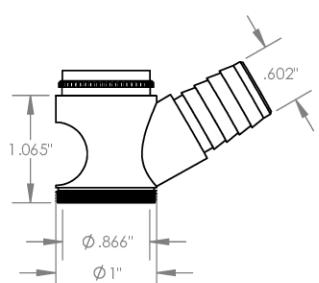

**VE**  
Vacuum External  
Thread  
Cutter  $\phi 3/4"$  ( $\phi 19mm$ )



**SVI**  
Slotted Vacuum External  
Thread  
Cutter  $\phi 5/8"$  ( $\phi 15mm$ )



**SVE**  
Slotted Vacuum External  
Thread  
Cutter  $\phi 3/4"$  ( $\phi 19mm$ )

 <b>WESCON</b>	Part Number <b>WES596</b>
Do not modify, copy, distribute, or reproduce this drawing without prior written authorization.  All dimensions are in Inches	© 2025 Wescon Industries Inc. 601 Century Plaza Dr, Houston, TX 77073, US <a href="http://www.wesconusa.com">www.wesconusa.com</a>  Information in this drawing is provided for reference only
	Wescon 596 Microstop

Image 2


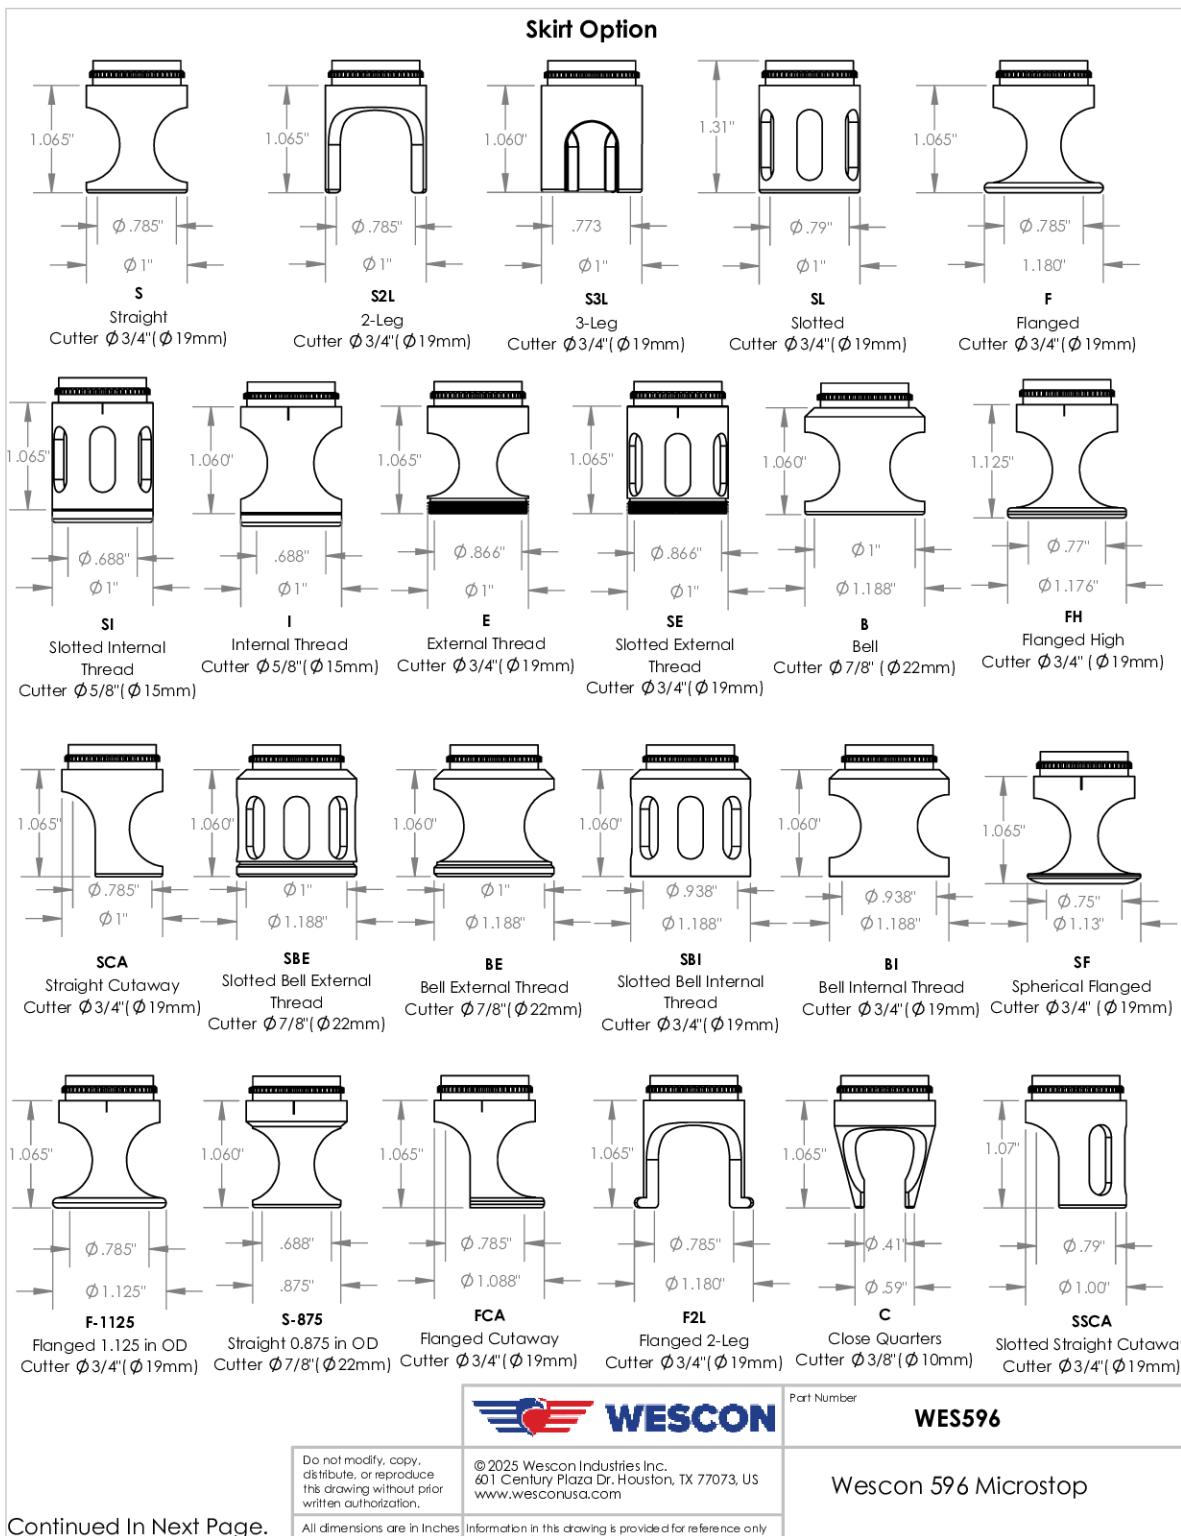



Image 3

**Foot Style  
For External Thread**

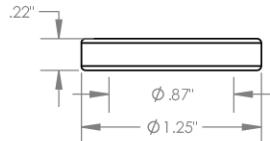


Part Number	Material
59631-N	Nylon
59631-S	Steel
59361-P	Phenolic

**Foot Style  
For Internal Thread**




Part Number	Material
59620-N	Nylon
59620-S	Steel
59620-P	Phenolic

**Foot Style  
For Bell External Thread**

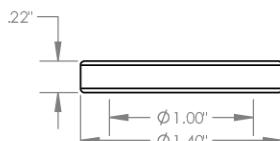

Part Number	Material
59641-N	Nylon
59641-S	Steel
59641-P	Phenolic

**Foot Style  
For Bell Internal Thread**

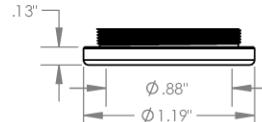

Part Number	Material
59640-N	Nylon
59640-S	Steel
59640-P	Phenolic



Part Number

**WES596**

Do not modify, copy,  
distribute, or reproduce  
this drawing without prior  
written authorization.

© 2025 Wescon Industries Inc.  
601 Century Plaza Dr, Houston, TX 77073, US  
www.wesconusa.com

All dimensions are in Inches

Information in this drawing is provided for reference only

Wescon 596 Microstop

Image 4