

DATASHEET

PART NUMBER

WES598-6-BVEN

**Wescon 598 Microstop - M6x1 - 22 mm Cutter
Capacity - Bell Vacuum External Thread Skirt -
Nylon Foot**

10 DEGREE PIVOTING SHAFT (SWIVEL SHAFT) / HIGH
SPEED HEAVY DUTY

WEBSITE

<https://www.wesconusa.com/products/WES598-6-BVEN>




* The image represents the general look of the series. Actual product may vary based on options selected.

SPECIFICATIONS

Measurement Type	Metric
Bearing Rating	10,000 rpm
Bearing Type	Dual Ball Bearings
Heavy Duty Thrust Bearing	Yes
Incremental Adjustment	0.013 mm
Shaft Travel	7.60 mm
Dust Seal	Integrated Dust Seal
Cutter Thread	M6x1
Shaft	Round - Pivoting / Swivel Shaft
Shaft Diameter	6.35 mm
Cutter Capacity	22 mm
Skirt	Bell Vacuum External Thread
Skirt Description	35.6 mm OD 22 mm Cutter Capacity
Foot	Nylon
Solid Stop	Yes
Material	Steel
Vacuum Adapter	Yes

Country of Origin	USA
-------------------	-----

ADDITIONAL IMAGES AND DRAWINGS



Part Number
WES598-X-XX-XX

Shaft Option
 Foot Style
 Skirt Option*
 Cutter Thread


Code	Cutter Thread
(Blank)	1/4-28
6	M6x1
8	M8x1

Code	Shaft Option
(Blank)	Round Swivel Shaft
-QC	Quick Change Swivel Shaft
-TF	Tri Flat Swivel Shaft


Code	Foot Style
N	Nylon
S	Steel
P	Phenolic

Incremental Adjustment: 0.0005 in
 Shaft Travel: 0.300 in

 Bearing Rating: 10,000 rpm
 Bearing Type: Dual Ball-Bearings
 Dust Seal: Integrated Dust Seal
 Heavy Duty Thrust Bearing: Yes
 Solid Stop: Yes

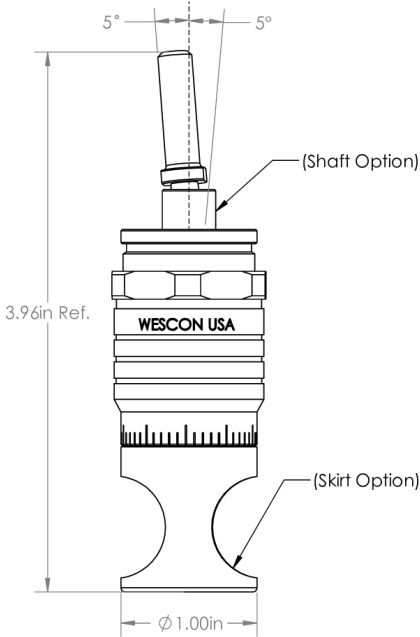

5° 5°
 3.96in Ref.
 (Shaft Option)
 (Skirt Option)
 Ø 1.00in



© 2025 Wescon Industries Inc.
 601 Century Plaza Dr. Houston, TX 77073, US
 www.wesconusa.com

Part Number

WES598

Wescon 598 Microstop

*For Skirt options see next page and website.

All dimensions are in inches

Information in this drawing is provided for reference only

Image 1

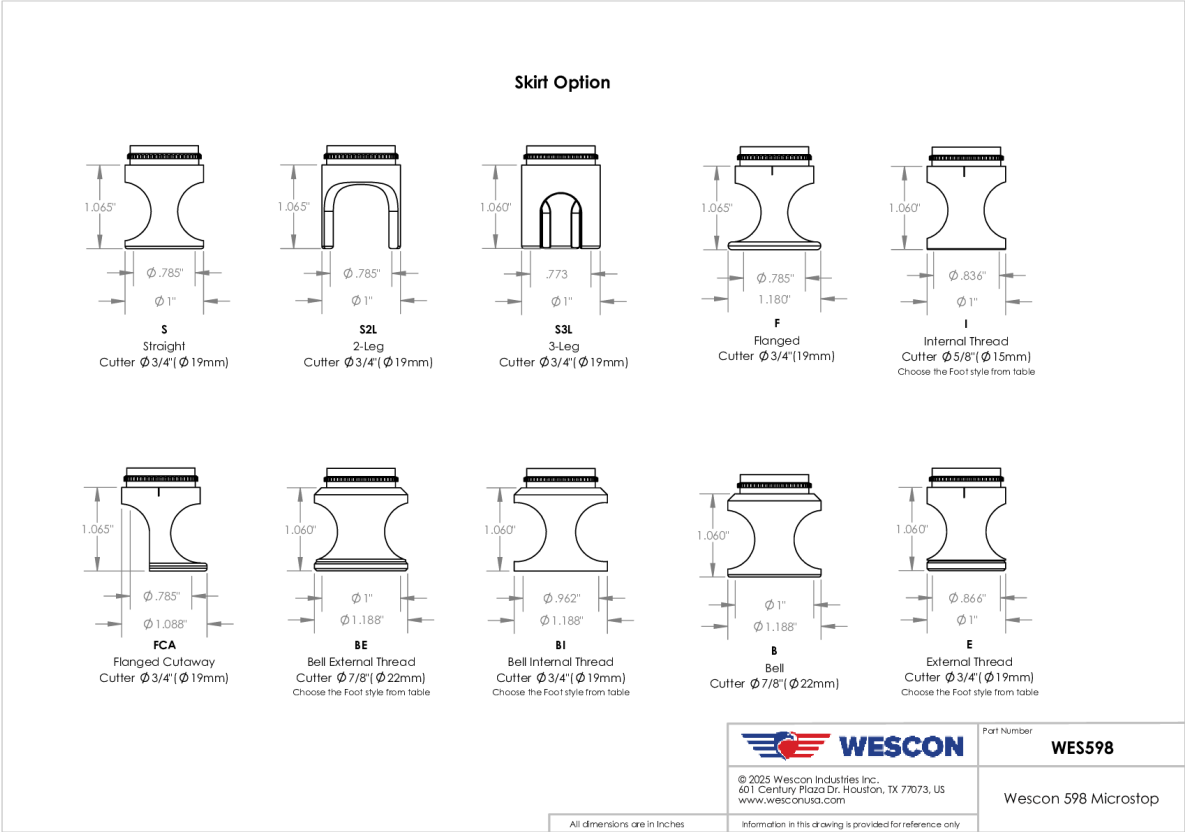


Image 2