

DATASHEET

PART NUMBER

WES696-1500-S3L-QC

**Wescon 696 Microstop - 3/8-24 - 1-1/2" Cutter
Capacity - 3-Leg Skirt**

LARGE CAPACITY UNITS FOR ALUMINUM &
COMPOSITES

WEBSITE

<https://www.wesconusa.com/products/WES696-1500-S3L-QC>




* The image represents the general look of the series. Actual product may vary based on options selected.

SPECIFICATIONS

Measurement Type	Imperial
Bearing Rating	10,000 rpm
Bearing Type	Dual Ball-Bearings
Heavy Duty Thrust Bearing	Yes
Incremental Adjustment	0.0005 in
Shaft Travel	1/2 in
Dust Seal	Integrated Dust Seal
Cutter Thread	3/8-24
Shaft	Quick Change
Shaft Diameter	3/8 in
Cutter Capacity	1-1/2 in
Skirt	3-Leg
Solid Stop	Yes
Material	Steel
Country of Origin	USA

ADDITIONAL IMAGES AND DRAWINGS

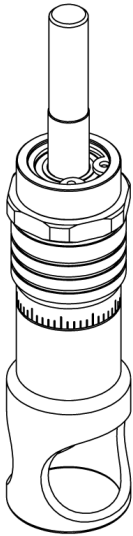

Part Number
WES696-XX-XX-XX-XX

- Shaft Option
- Shaft Thread
- Foot Style
- Skirt Option*
- Cutter Capacity

Code	Cutter Capacity
875	7/8"(22mm)
1000	1"(25mm)
1250	1-1/4"(32mm)
1375	1-3/8"(35mm)
1500	1-1/2"(38mm)
2000	2"(50.8mm)


Code	Shaft Thread
Blank	3/8-24
4320	7/16-20
8	M8x1
10	M10x1

Code	Foot Style
N	Nylon
S	Steel

Code	Shaft Option
(Blank)	Round
-QC	Quick Change
-TF	Tri Flat

Incremental Adjustment: 0.0005 in
Shaft Travel: 0.500 in
Cutter Thread: 1/4-28

Bearing Rating: 10,000 rpm
Bearing Type: Dual Ball Bearings
Dust Seal: Integrated Dust Seal
Heavy Duty Thrust Bearing: Yes
Solid Stop: Yes

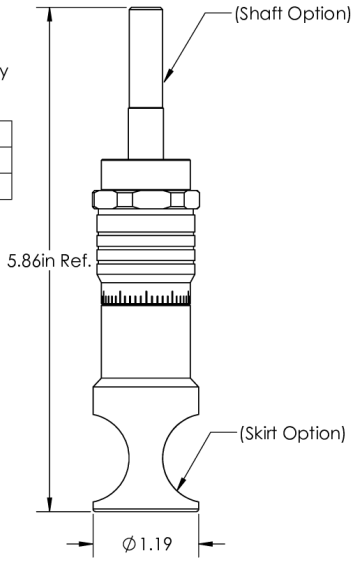

(Shaft Option)

5.86in Ref.

(Skirt Option)

Ø 1.19

 © 2025 Wescon Industries Inc. 601 Century Plaza Dr. Houston, TX 77073, US www.wesconusa.com	Part Number WES696
Wescon 696 Microstop	

*For skirt options ,cutter capacity see next page and website.

All dimensions are in inches

Information in this drawing is provided for reference only

Image 1

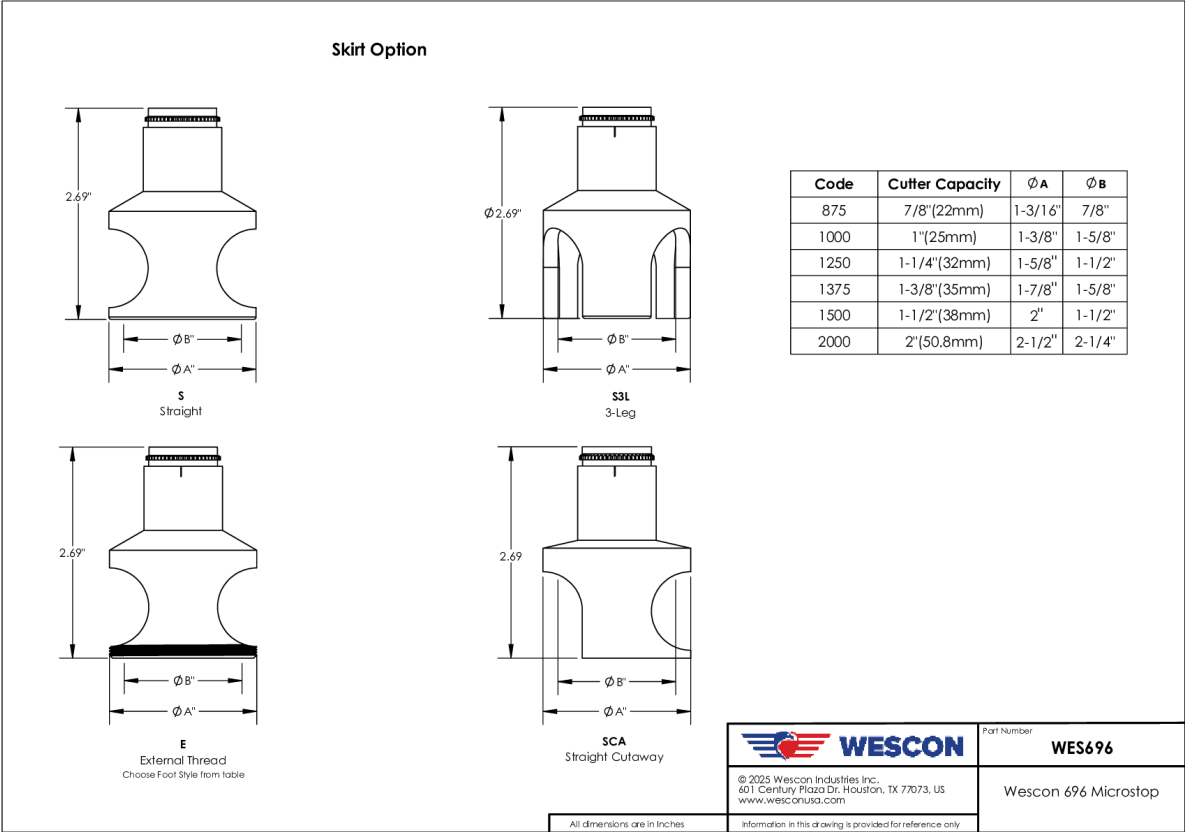


Image 2