

## DATASHEET

### PART NUMBER

**WES696-2000-SL-4320-QC**

**Wescon 696 Microstop - 7/16-20 - 2" Cutter  
Capacity - Slotted Skirt**

LARGE CAPACITY UNITS FOR ALUMINUM &  
COMPOSITES

### WEBSITE

<https://www.wesconusa.com/products/WES696-2000-SL-4320-QC>



\* The image represents the general look of the series. Actual product may vary based on options selected.

## SPECIFICATIONS

|                           |                      |
|---------------------------|----------------------|
| Measurement Type          | Imperial             |
| Bearing Rating            | 10,000 rpm           |
| Bearing Type              | Dual Ball-Bearings   |
| Heavy Duty Thrust Bearing | Yes                  |
| Incremental Adjustment    | 0.0005 in            |
| Shaft Travel              | 1/2 in               |
| Dust Seal                 | Integrated Dust Seal |
| Cutter Thread             | 7/16-20              |
| Shaft                     | Quick Change         |
| Shaft Diameter            | 3/8 in               |
| Cutter Capacity           | 2 in                 |
| Skirt                     | Slotted              |
| Solid Stop                | Yes                  |
| Material                  | Steel                |
| Country of Origin         | USA                  |

ADDITIONAL IMAGES AND DRAWINGS

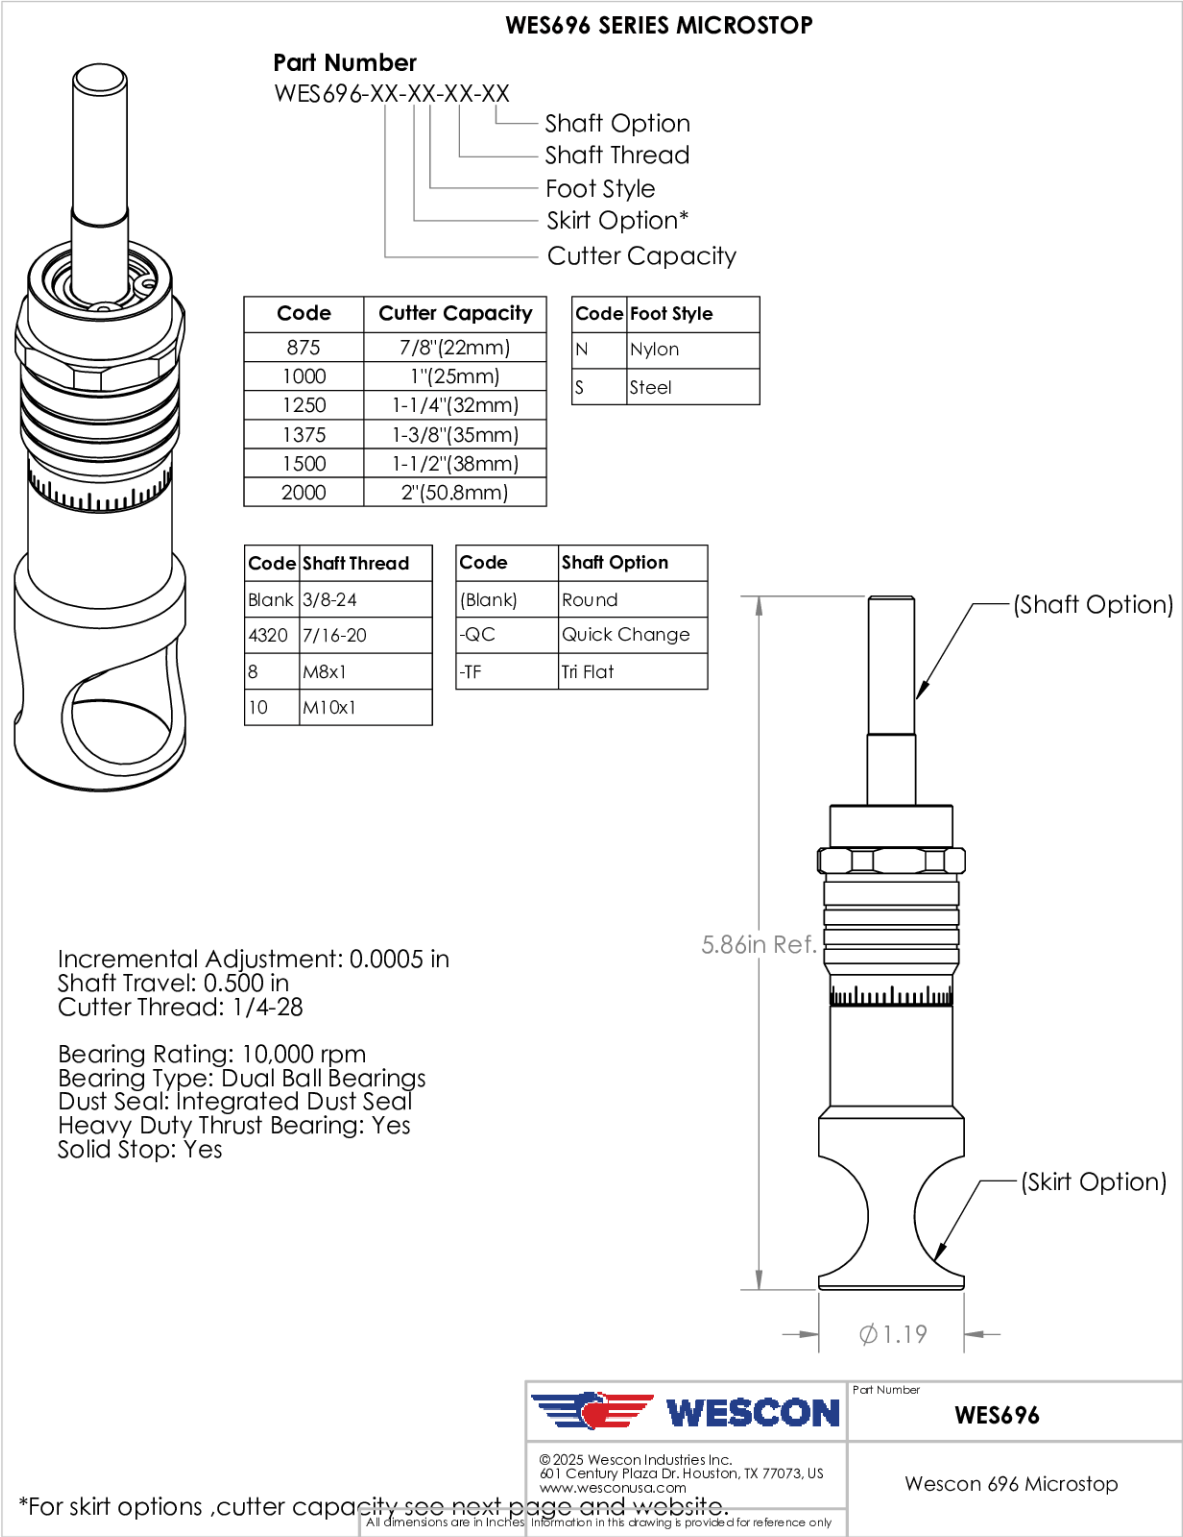


Image 1

## Skirt Option



**S**  
Straight



**S3L**  
3-Leg

| Code | Cutter Capacity | $\phi A$ | $\phi B$ |
|------|-----------------|----------|----------|
| 875  | 7/8"(22mm)      | 1-3/16"  | 7/8"     |
| 1000 | 1"(25mm)        | 1-3/8"   | 1-5/8"   |
| 1250 | 1-1/4"(32mm)    | 1-5/8"   | 1-1/2"   |
| 1375 | 1-3/8"(35mm)    | 1-7/8"   | 1-5/8"   |
| 1500 | 1-1/2"(38mm)    | 2"       | 1-1/2"   |
| 2000 | 2"(50.8mm)      | 2-1/2"   | 2-1/4"   |



**E**  
External Thread  
Choose Foot Style from table



**SCA**  
Straight Cutaway



**WESCON**

© 2025 Wescon Industries Inc.  
401 Century Plaza Dr. Houston, TX 77073, US  
www.wesconusa.com

Part Number

**WES696**

Wescon 696 Microstop

All dimensions are in Inches. Information in this drawing is provided for reference only.

Image 2

**Foot Style  
For External Thread**



| Part Number | Material |
|-------------|----------|
| 59631-N     | Nylon    |
| 59631-S     | Steel    |
| 59361-P     | Phenolic |

**Foot Style  
For Internal Thread**



| Part Number | Material |
|-------------|----------|
| 59620-N     | Nylon    |
| 59620-S     | Steel    |
| 59620-P     | Phenolic |

**Foot Style  
For Bell External Thread**



| Part Number | Material |
|-------------|----------|
| 59641-N     | Nylon    |
| 59641-S     | Steel    |
| 59641-P     | Phenolic |

**Foot Style  
For Bell Internal Thread**



| Part Number | Material |
|-------------|----------|
| 59640-N     | Nylon    |
| 59640-S     | Steel    |
| 59640-P     | Phenolic |

|                                                                                                                                                                                                        |                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
|  <b>WESCON</b><br>© 2025 Wescon Industries Inc.<br>401 Century Plaza Dr. Houston, TX 77073, US<br>www.wesconusa.com | Part Number<br><b>WES696</b> |
|                                                                                                                                                                                                        | Wescon 696 Microstop         |

All dimensions are in Inches. Information in this drawing is provided for reference only.

Image 3