



# **DATASHEET**

PART NUMBER

# WES696-8-1375-SEN-TF

Wescon 696 Microstop - M8x1 - 35 mm Cutter Capacity - Slotted External Thread Skirt -Nylon Foot

LARGE CAPACITY UNITS FOR ALUMINUM & COMPOSITES

### **WEBSITE**

https://www.wesconusa.com/products/WES696-8-1375-SEN-TF



\* The image represents the general look of the series. Actual product may vary based on options selected.

### **SPECIFICATIONS**

Measurement Type	Metric
Bearing Rating	10,000 rpm
Bearing Type	Dual Ball-Bearings
<b>Heavy Duty Thrust Bearing</b>	Yes
Incremental Adjustment	0.013 mm
Shaft Travel	12.70 mm
Dust Seal	Integrated Dust Seal
Cutter Thread	M8x1
Shaft	Tri-Flat
Shaft Diameter	9.525 mm
Cutter Capacity	35 mm
Skirt	Slotted External Thread
Foot	Nylon
Solid Stop	Yes
Material	Steel
Country of Origin	USA

### **ADDITIONAL IMAGES AND DRAWINGS**

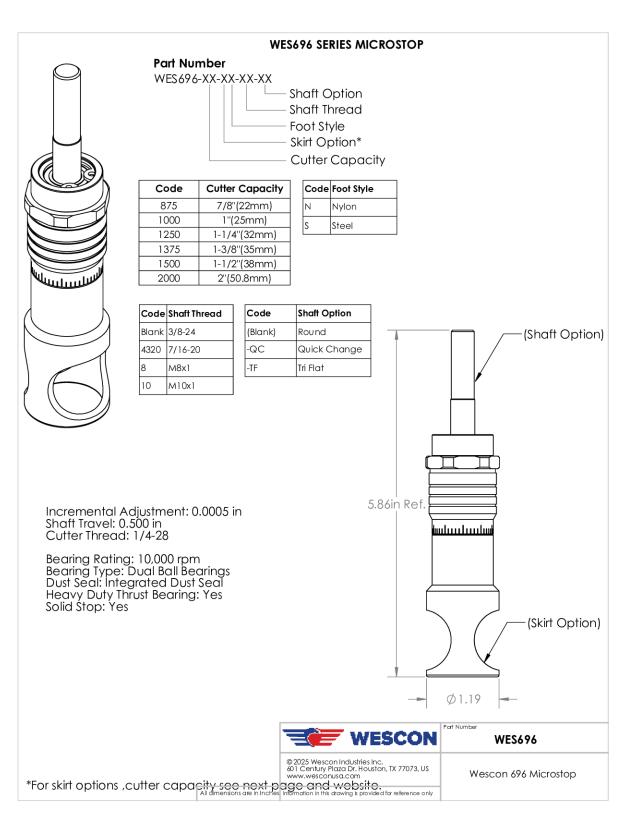


Image 1


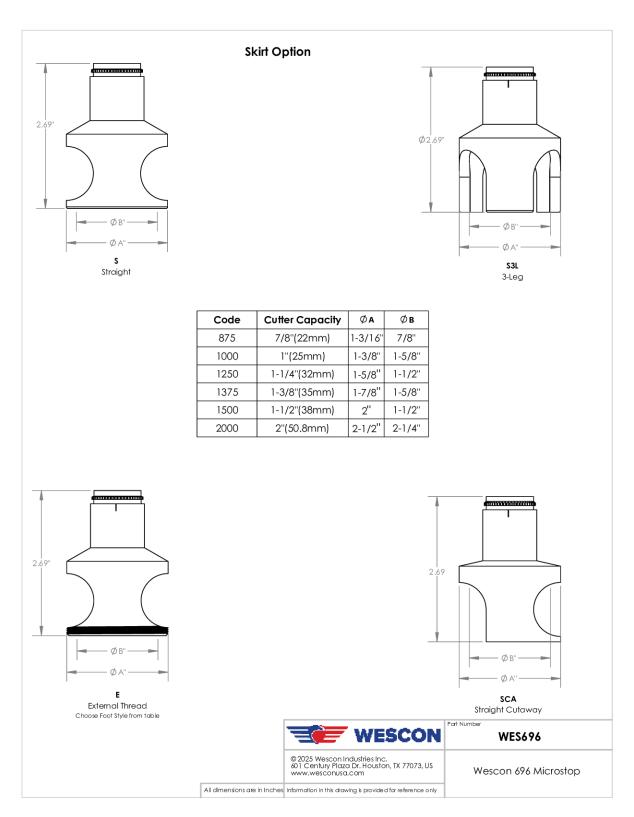


Image 2


# Foot Style For External Thread 22" | Part Nur | 59631-N | 59631-S | 59361-P |


## Foot Style For Internal Thread




Part Number	Material
59620-N	Nylon
59620-S	Steel
59620-P	Phenolic









Part Number	Material
59640-N	Nylon
59640-S	Steel
59640-P	Phenolic

Foot Style For Bell Internal Thread



**WES696** 

Wescon 696 Microstop

Image 3