

## DATASHEET

### PART NUMBER

**WESSF-48-8-4688**

**Wescon WESSF Slip/Fixed Renewable Drill  
Bushing - OD 3/4" - Length 1/2" - Size 15/32  
(0.4688in)**

Slip/fixed renewable drill bushings, Type SF, also known as slip fit bushings for egg cup drill guides. Hardened steel, 5/16, 1/2 and 3/4 in OD, 1/2 to 1 in long, wire gauge, fractional and decimal ID sizes.

### WEBSITE

<https://www.wesconusa.com/products/WESSF-48-8-4688>



\* The image represents the general look of the series. Actual product may vary based on options selected.

Slip/fixed renewable drill bushings, Type SF, also known as slip fit bushings for egg cup drill guides. Hardened steel, 5/16, 1/2 and 3/4 in OD, 1/2 to 1 in long, wire gauge, fractional and decimal ID sizes.

Wescon WESSF slip/fixed renewable drill bushings are Type SF bushings, the kind aircraft mechanics know as slip fit bushings for egg cup drill guides. The bushing slips into a press fit liner and is held by a lock screw or clamp, so a worn bushing or a size change takes seconds without disturbing the guide or the jig. They are made for high volume production drilling where bushings wear out before the job is done, and for drill then ream or tap sequences in the same hole.

Each bushing is hardened steel for wear resistance and holds tight tolerance on the drill. Sizes cover wire gauge, fractional and decimal drill diameters in 5/16, 1/2 and 3/4 in outside diameters, 1/2 to 1 in long. Use them with Wescon egg cup and tri-pod drill guides, slip/fixed renewable bushing guides and drill bars.

## SPECIFICATIONS

|                         |                  |
|-------------------------|------------------|
| Measurement Type        | Imperial         |
| Size (ID)               | 15/32 (0.4688in) |
| Body Diameter (OD)      | 3/4"             |
| Length                  | 1/2"             |
| ANSI B94.33 Designation | SF-48-8-4688     |
| Country of Origin       | USA              |

ADDITIONAL IMAGES AND DRAWINGS

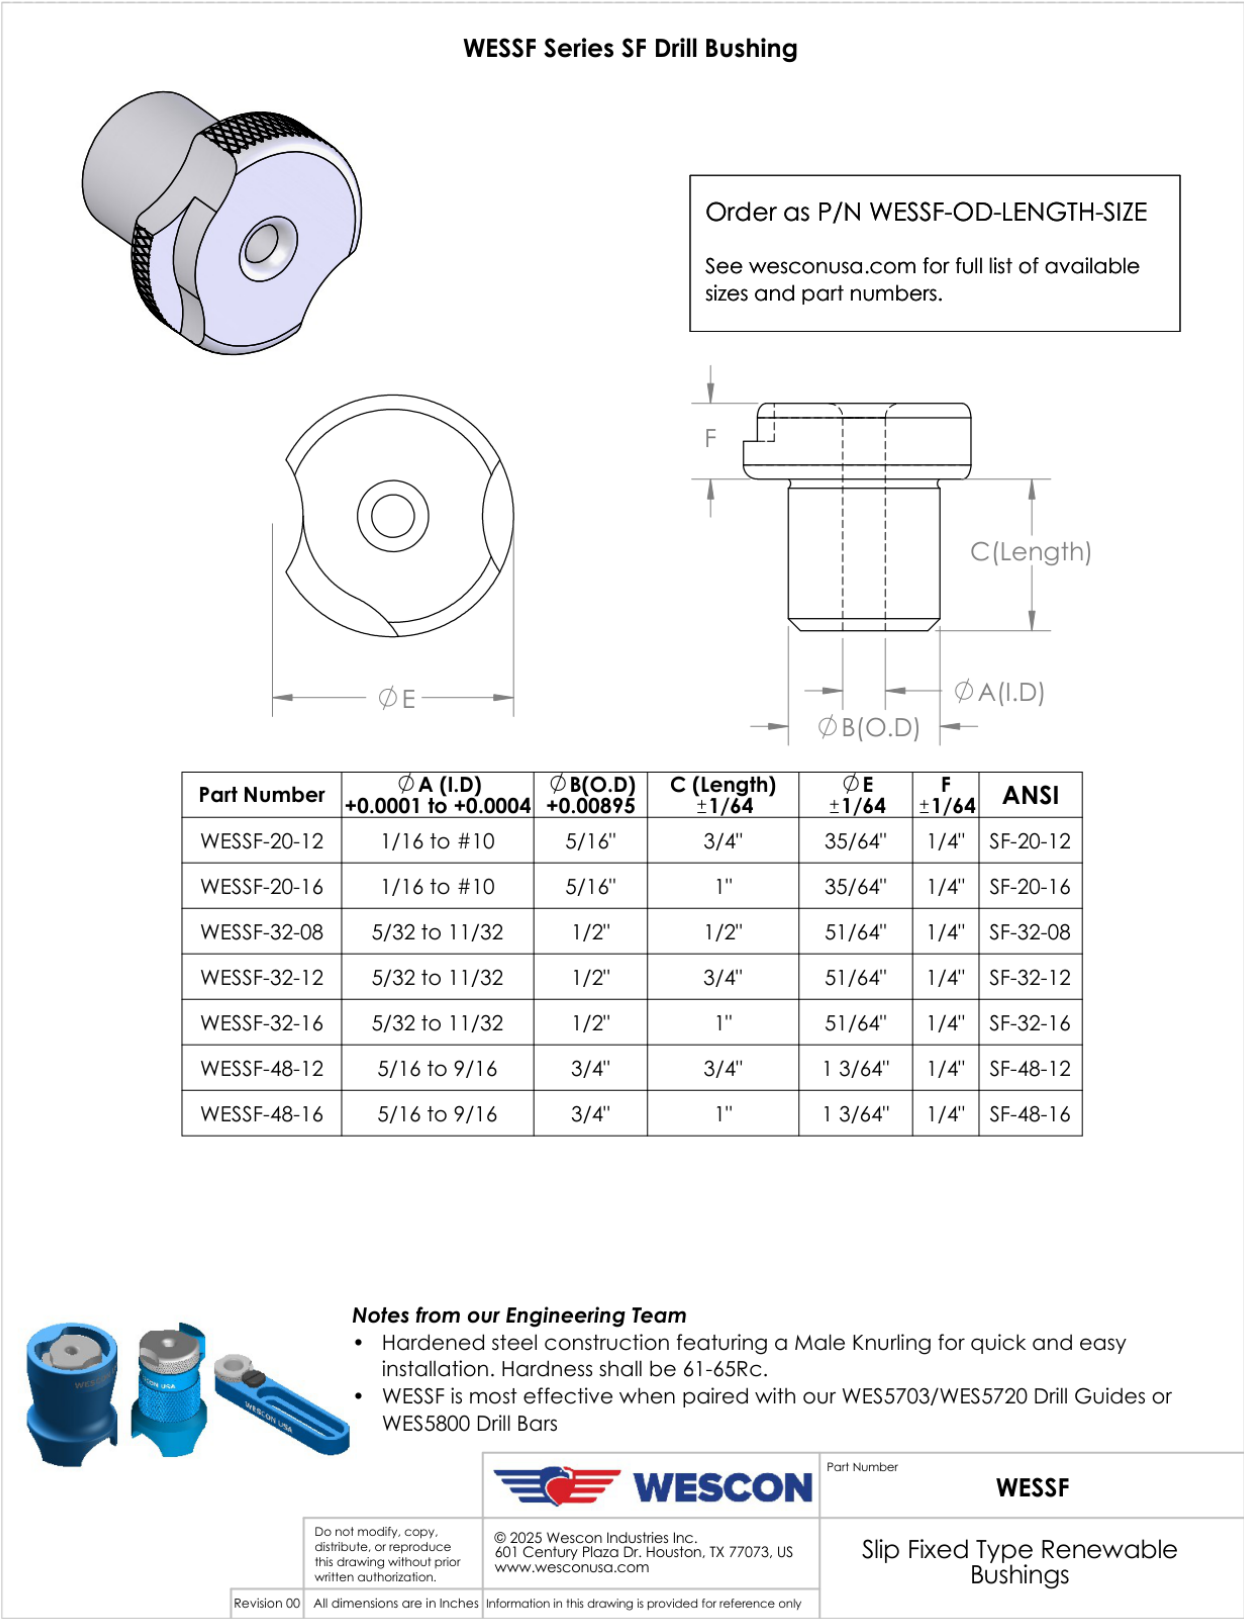


Image 1