

DATASHEET

PART NUMBER

WES696-1500-SEN

**Wescon 696 Microstop - 3/8-24 - 1-1/2" Cutter
Capacity - Slotted External Thread Skirt -
Nylon Foot**

LARGE CAPACITY UNITS FOR ALUMINUM &
COMPOSITES

WEBSITE

<https://www.wesconusa.com/products/WES696-1500-SEN>




* The image represents the general look of the series. Actual product may vary based on options selected.

SPECIFICATIONS

Measurement Type	Imperial
Bearing Rating	10,000 rpm
Bearing Type	Dual Ball-Bearings
Heavy Duty Thrust Bearing	Yes
Incremental Adjustment	0.0005 in
Shaft Travel	1/2 in
Dust Seal	Integrated Dust Seal
Cutter Thread	3/8-24
Shaft	Round
Shaft Diameter	3/8 in
Cutter Capacity	1-1/2 in
Skirt	Slotted External Thread
Foot	Nylon
Solid Stop	Yes
Material	Steel
Country of Origin	USA

ADDITIONAL IMAGES AND DRAWINGS



Part Number
WES696-XX-XX-XX-XX

- Shaft Option
- Shaft Thread
- Foot Style
- Skirt Option*
- Cutter Capacity

Code	Cutter Capacity
875	7/8"(22mm)
1000	1"(25mm)
1250	1-1/4"(32mm)
1375	1-3/8"(35mm)
1500	1-1/2"(38mm)
2000	2"(50.8mm)


Code	Shaft Thread
Blank	3/8-24
4320	7/16-20
8	M8x1
10	M10x1

Code	Foot Style
N	Nylon
S	Steel

Code	Shaft Option
(Blank)	Round
-QC	Quick Change
-TF	Tri Flat

Incremental Adjustment: 0.0005 in
Shaft Travel: 0.500 in
Cutter Thread: 1/4-28

Bearing Rating: 10,000 rpm
Bearing Type: Dual Ball Bearings
Dust Seal: Integrated Dust Seal
Heavy Duty Thrust Bearing: Yes
Solid Stop: Yes

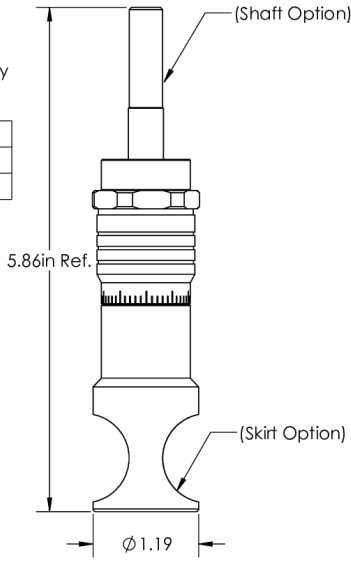

5.86in Ref.

(Shaft Option)

(Skirt Option)

Ø 1.19

**WESCON**

© 2025 Wescon Industries Inc.
601 Century Plaza Dr. Houston, TX 77073, US
www.wesconusa.com

Part Number

WES696

Wescon 696 Microstop


*For skirt options ,cutter capacity see next page and website.

All dimensions are in inches


Information in this drawing is provided for reference only

Image 1


Skirt Option




S
Straight



S3L
3-Leg



E
External Thread
Choose Foot Style from table



SCA
Straight Cutaway

Code	Cutter Capacity	ϕA	ϕB
875	7/8" (22mm)	1-3/16"	7/8"
1000	1" (25mm)	1-3/8"	1-5/8"
1250	1-1/4" (32mm)	1-5/8"	1-1/2"
1375	1-3/8" (35mm)	1-7/8"	1-5/8"
1500	1-1/2" (38mm)	2"	1-1/2"
2000	2" (50.8mm)	2-1/2"	2-1/4"

 WESCON © 2025 Wescon Industries Inc. 601 Century Plaza Dr. Houston, TX 77073, US www.wesconusa.com	Part Number WES696
Wescon 696 Microstop	

All dimensions are in inches

Information in this drawing is provided for reference only

Image 2