

DATASHEET

PART NUMBER

WES696-8-1500-EN-QC

Wescon 696 Microstop - M8x1 - 38 mm Cutter Capacity - External Thread Skirt - Nylon Foot

LARGE CAPACITY UNITS FOR ALUMINUM &
COMPOSITES

WEBSITE

<https://www.wesconusa.com/products/WES696-8-1500-EN-QC>




* The image represents the general look of the series. Actual product may vary based on options selected.

SPECIFICATIONS

Measurement Type	Metric
Bearing Rating	10,000 rpm
Bearing Type	Dual Ball-Bearings
Heavy Duty Thrust Bearing	Yes
Incremental Adjustment	0.013 mm
Shaft Travel	12.70 mm
Dust Seal	Integrated Dust Seal
Cutter Thread	M8x1
Shaft	Quick Change
Shaft Diameter	9.525 mm
Cutter Capacity	38 mm
Skirt	External Thread
Foot	Nylon
Solid Stop	Yes
Material	Steel
Country of Origin	USA

ADDITIONAL IMAGES AND DRAWINGS

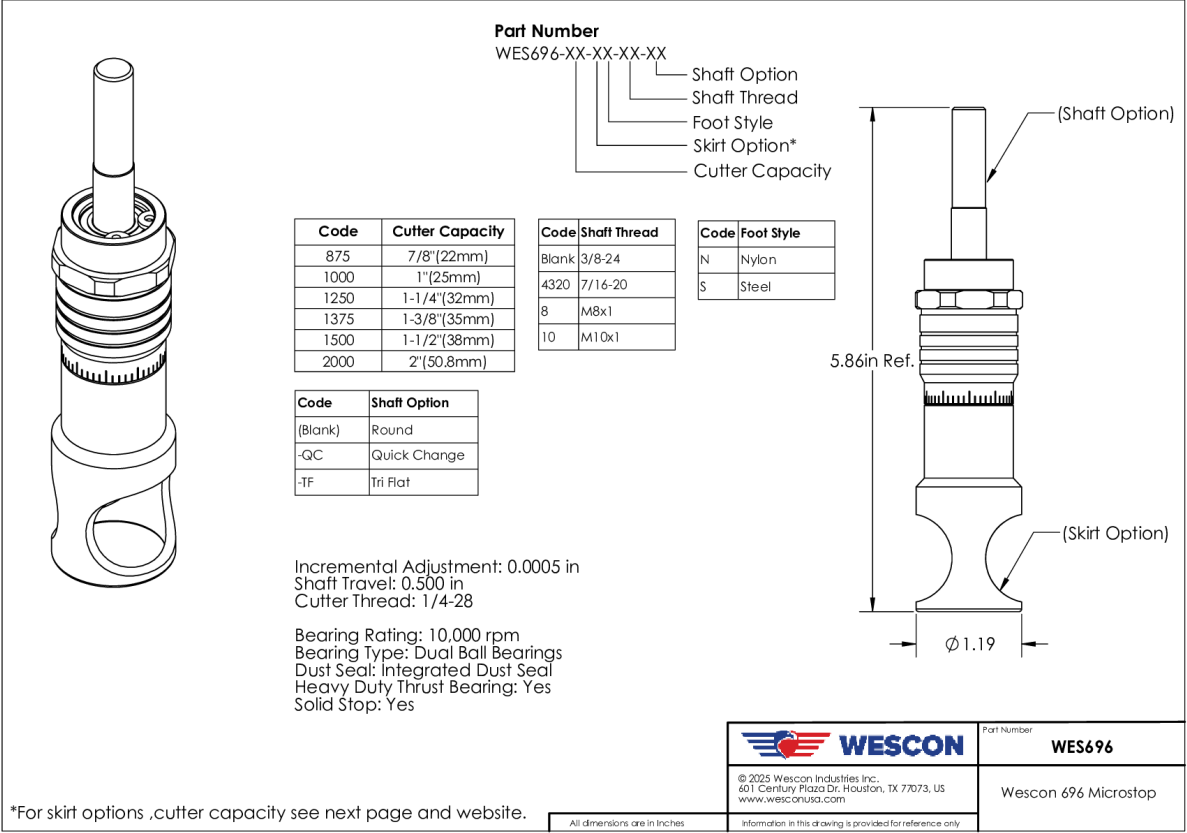


*For skirt options ,cutter capacity see next page and website.

All dimensions are in inches


Information in this drawing is provided for reference only

Image 1

Skirt Option




S
Straight




S3L
3-Leg

Code	Cutter Capacity	Ø A	Ø B
875	7/8" (22mm)	1-3/16"	7/8"
1000	1" (25mm)	1-3/8"	1-5/8"
1250	1-1/4" (32mm)	1-5/8"	1-1/2"
1375	1-3/8" (35mm)	1-7/8"	1-5/8"
1500	1-1/2" (38mm)	2"	1-1/2"
2000	2" (50.8mm)	2-1/2"	2-1/4"



E
External Thread
Choose Foot Style from table



SCA
Straight Cutaway



© 2025 Wescon Industries Inc.
601 Century Plaza Dr. Houston, TX 77073, US
www.wesconusa.com

Part Number
WES696

Wescon 696 Microstop

All dimensions are in inches

Information in this drawing is provided for reference only

Image 2