

DATASHEET

PART NUMBER

WESSF-48-8-4063

Wescon WESSF Slip/Fixed Renewable Drill Bushing - OD 3/4" - Length 1/2" - Size 13/32 (0.4063in)

Slip/fixed renewable drill bushings, Type SF, also known as slip fit bushings for egg cup drill guides. Hardened steel, 5/16, 1/2 and 3/4 in OD, 1/2 to 1 in long, wire gauge, fractional and decimal ID sizes.

WEBSITE

<https://www.wesconusa.com/products/WESSF-48-8-4063>



* The image represents the general look of the series. Actual product may vary based on options selected.

Slip/fixed renewable drill bushings, Type SF, also known as slip fit bushings for egg cup drill guides. Hardened steel, 5/16, 1/2 and 3/4 in OD, 1/2 to 1 in long, wire gauge, fractional and decimal ID sizes.

Wescon WESSF slip/fixed renewable drill bushings are Type SF bushings, the kind aircraft mechanics know as slip fit bushings for egg cup drill guides. The bushing slips into a press fit liner and is held by a lock screw or clamp, so a worn bushing or a size change takes seconds without disturbing the guide or the jig. They are made for high volume production drilling where bushings wear out before the job is done, and for drill then ream or tap sequences in the same hole.

Each bushing is hardened steel for wear resistance and holds tight tolerance on the drill. Sizes cover wire gauge, fractional and decimal drill diameters in 5/16, 1/2 and 3/4 in outside diameters, 1/2 to 1 in long. Use them with Wescon egg cup and tri-pod drill guides, slip/fixed renewable bushing guides and drill bars.

SPECIFICATIONS

Measurement Type	Imperial
Size (ID)	13/32 (0.4063in)
Body Diameter (OD)	3/4"
Length	1/2"
ANSI B94.33 Designation	SF-48-8-4063
Country of Origin	USA

ADDITIONAL IMAGES AND DRAWINGS

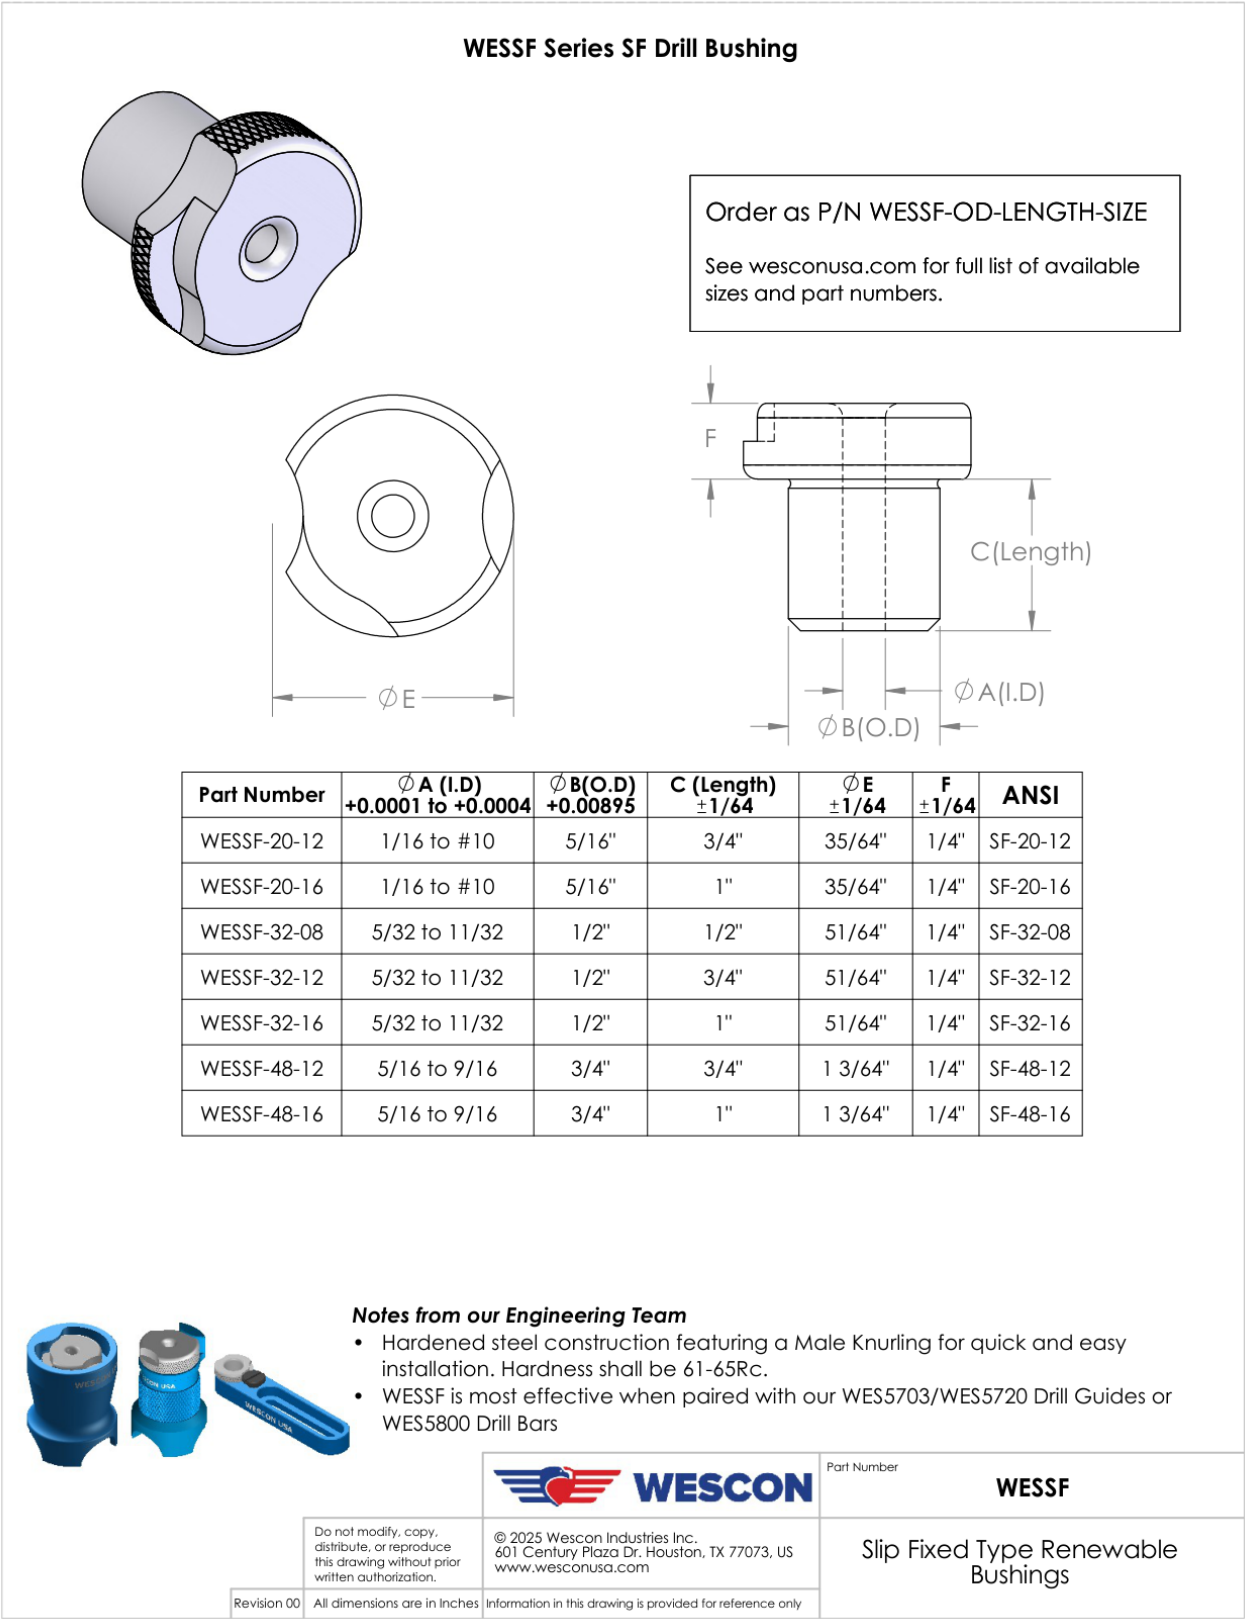


Image 1